COMPAKTUNA®

FILLER GP

Water-repellent grout for façade bricks

CE
24

COMPAKTUNA® bv/srl
INDUSTRIEPARK ZWIJNAARDE 6
9052 GENT – BELGIUM

0965

019/CPR/240614


EN 998-2 :2016

FILLER GP

Dry masonry mortar for normal use/performance mortar/internal and external use

TYPE G


Compressive strength	**Class M15**
Water absorption	**0,5 kg/m²min^{0,5}**

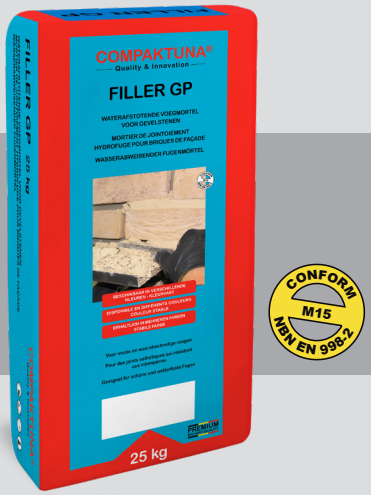









CHARACTERISTICS

Ready-to-use, dry grout, moisture-resistant, made from cleaned and sieved sand, cement, and modified additives. FILLER GP is used for grouting all brickwork, natural stone, etc. FILLER GP is available in different colors, which can be dry-mixed together if desired.

FILLER GP can be classified as M15 according to EN 998-2.

Mixing ratio	Consumption	Packaging
±2,5 L to 3,75 L water per 25 kg bag (± 10 to 15%)	250 g/lm (1x1 cm joint)	25 kg PE
Colour	**Processing time**	**Application temperature**
White, light beige, rustic, beige, brown-beige, brick red, gray-brown, light gray, gray, silver gray, dark gray, gray-black, rust brown.	Depending on the temperature, humidity, and nature of the materials.	+5 °C to +30 °C

FILLER GP

DIRECTIONS FOR USE

Highly absorbent surfaces should be pre-moistened. FILLER GP is mixed with approximately 10% to 15% water, which is about 2.5 L to 3.75 L of water per 25 kg of product. Always add the same amount of water! Try to maintain consistent working conditions (temperature, humidity, substrate, weather conditions) as much as possible.



REMARKS

- Ready-made cement mortars may show slight color differences, independent of our will, caused by variations in the cement and the fillers used. We do not take responsibility for this. We recommend purchasing the total required amount of product at once for the same job.
- For grouting windows and doors, we recommend our elastic sealant (SILICONE SN & NA & SEAL-ALL® FACADE).
- Protect drying grout from frost, precipitation, strong winds, and direct sunlight.
- When grouting newly built walls, they should be at least 1 month old.
- It is preferable to grout façades on the same day to avoid color differences due to weather conditions. Always use the same amount of mixing water.
- Maintain a joint depth of at least 1 cm.
- For grouting stone strips, please contact us.
- Refer to Technical Information 297 from Buildwise – Grouting of masonry.










PACKAGING

FILLER GP is available in gray, white, light gray, dark gray, beige, rustic, silver gray, light beige, brick red, gray-brown, dark gray, brown-beige, and rust brown colors, in polyethylene bags of 25 kg. The shelf life is 12 months in the original, sealed packaging, stored in a dry place.

AVAILABLE COLOURS

Ask for the color chart below.

(The colors are shown approximately.)

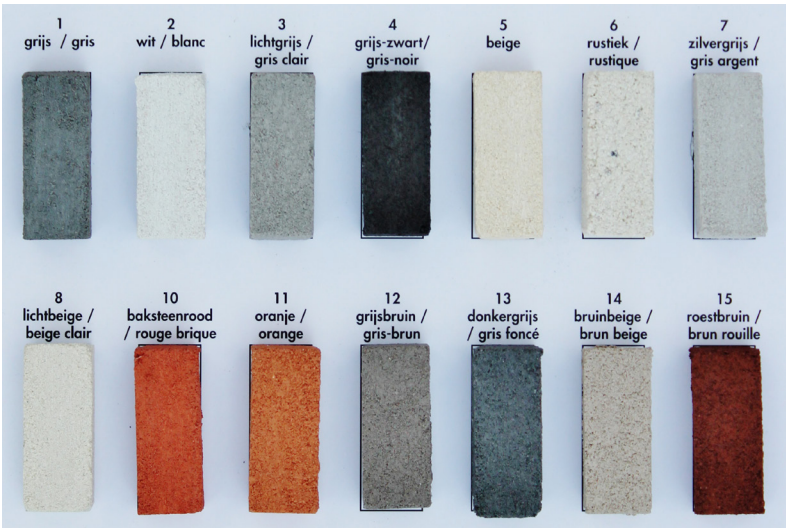

* 11. Orange available upon request

As the applications of our products are diverse, no single application guideline can be laid down. All product data refl ect the state of knowledge of our products at the time of publication. Therefore all suggestions and recommendations concerning the use of our products are merely illustrative. Apply the product on a small and insignifi cant spot before starting to use our products to be sure the desired result is obtained. Always ask for the technical sheet of our products. Visit the website www.compaktuna.be. Consult our "technical department" which can be reached for free on the green number 0800/92279. The Dutch text shall be exclusively binding.
Version 10/02/2014. **COMPAKTUNA BV is EN ISO 9001 certified.**

COMPAKTUNA®
Quality & Innovation

A MEMBER OF HOLCIM GROUP

COMPAKTUNA bv/srl
Industriepark III
Industriepark Zwijnaarde 6
9052 Gent - Belgium
T +32 9 221 11 16
VAT BE0400.166.768 - R.P.R. Gent
info@compaktuna.be
www.compaktuna.be

20240612