



# CUBILOX

C A T A L O G

NYLON | ALUMINIUM | STAINLESS STEEL

WWW.CUBILOX.BE

# SANITARY FITTINGS CUBILOX

NSE produces fittings and accessories for sanitary partitions, cubicles, changing rooms and lockers, all under the **CUBILOX** label.

CUBILOX products are available in nylon, aluminium and 304 and 316 stainless steel.


All CUBILOX products are developed, manufactured and assembled in-house. When designing a CUBILOX product, the aesthetic and functional aspects are carefully considered. The CUBILOX products are made of high quality materials such as nylon fiberglass, nylon, aluminium 6063 T6, stainless steel 304 or 316 with surface finishes to the highest standard.

All products are in stock. Incoming orders are processed daily and can be dispatched the day after receiving of your order.




Our competitive prices, outstanding quality and excellent service are highly valued by our customers.

We believe that CUBILOX can provide significant added value to customers and installations.

IN LINE



OVERLAY DOORS




SHOWERS



CHANGING ROOMS

## SANITARY PARTITIONS

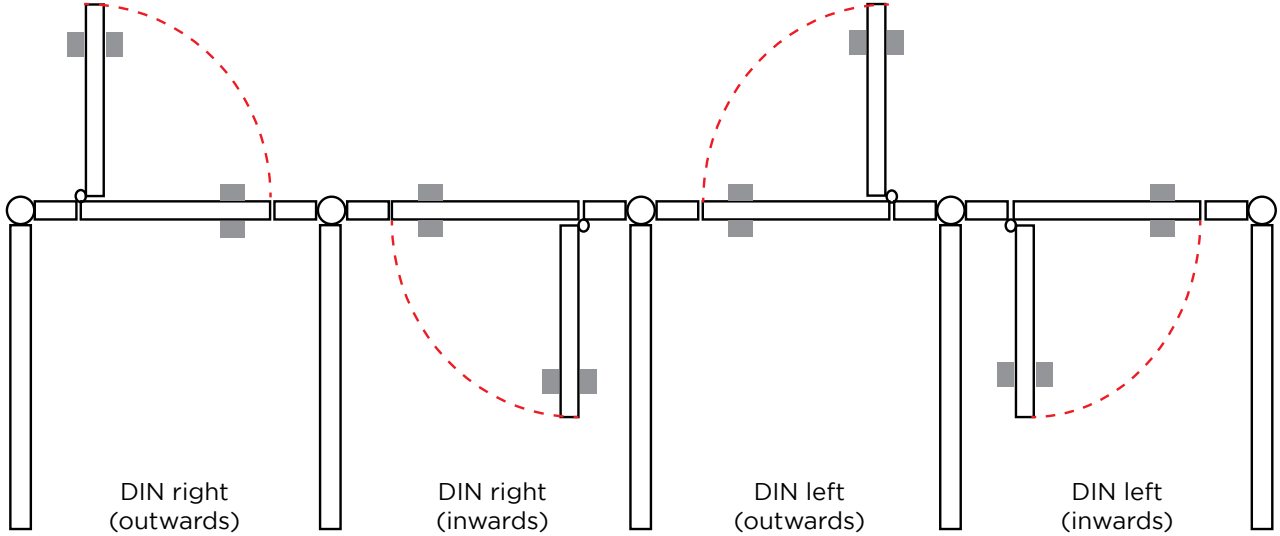

NYLON


The **CUBILOX** plastic range is made from a top-quality polyamide material which is resistant to high temperatures, moisture and chemicals. The products have a high-gloss finish with barely visible mould parting lines

The standard range consists of 7 COLOURS:

- RAL 7043 traffic grey B
- RAL 9010 pure white
- RAL 9005 jet black
- RAL 5003 sapphire blue
- RAL 7038 agate grey
- RAL 1021 rapeseed yellow
- RAL 3003 ruby red


The CUBILOX NYLON range includes door hardware for HPL (high pressure laminate) boards with 10 mm and 13 mm thickness and this for partitions/cubicles with outward- or inward-opening doors, for full in-line as well as overlay doors.

| ADJUSTABLE PANEL HOLDER<br>130 - 170 MM<br>FOR PANEL 13 MM                            | COLOUR | QTY/BOX | QTY/<br>CARTON | ART. | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------|--------|---------|----------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | ■      | 12      | 72             | 5000 | <b>REF. 50 - ADJUSTABLE PANEL HOLDER 130-170 MM - 13 MM</b><br>/ adjustable polyamide foot for height under panel between 130 mm and 170 mm<br>/ suitable for a panel thickness of 13 mm<br>/ also suitable for a panel thickness of 10 mm provided a set of intermediate pieces ref. 78 is used<br>/ comes with 2 stainless steel cross-recessed countersunk head screws Ø 4.8 x 20 mm and 2 polyamide cover caps<br>/ 1 cover cap is provided with 2 cylindrical sleeves to secure the screws<br>/ the screws are invisible after the installation of the second cover cap on the panel holder (click system)<br>/ polyamide base with four 7 mm holes for attachment to the floor and Ø 71 mm polyamide cover cap |
|                                                                                       | □      | 12      | 72             | 5010 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 5020 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 5030 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 5040 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 5050 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 5060 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ADJUSTABLE, REINFORCED<br>PANEL HOLDER 90 - 130 MM<br>FOR PANEL 10 MM                 | COLOUR | QTY/BOX | QTY/<br>CARTON | ART. | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|    | ■      | 12      | 72             | 8100 | <b>REF. 81 - ADJUSTABLE REINFORCED PANEL HOLDER 90-130 MM - 10 MM</b><br>/ adjustable polyamide foot for height under panel between 90 mm and 130 mm<br>/ suitable for a panel thickness of 10 mm<br>/ delivered with 2 polyamide cover caps<br>/ the screws are invisible after the installation of the cover cap on the panel holder (click system)<br>/ polyamide base with four 7 mm holes for attachment to the floor and Ø 71 mm polyamide cover cap                                                                                                                                                                                                                                                           |
|                                                                                       | □      | 12      | 72             | 8110 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 8120 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 8140 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ADJUSTABLE, REINFORCED<br>PANEL HOLDER 90 - 130 MM<br>FOR PANEL 13 MM                 | COLOUR | QTY/BOX | QTY/<br>CARTON | ART. | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|  | ■      | 12      | 72             | 8300 | <b>REF. 83 - ADJUSTABLE REINFORCED PANEL HOLDER 90-130 MM - 13 MM</b><br>/ adjustable polyamide foot for height under panel between 90 mm and 130 mm<br>/ suitable for a panel thickness of 13 mm<br>/ delivered with 2 polyamide cover caps<br>/ the screws are invisible after the installation of the second cover cap on the panel holder (click system)<br>/ polyamide base with four 7 mm holes for attachment to the floor and Ø 71 mm polyamide cover cap                                                                                                                                                                                                                                                    |
|                                                                                       | □      | 12      | 72             | 8310 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 8320 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 8340 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ADJUSTABLE, REINFORCED<br>PANEL HOLDER 130 - 170 MM<br>FOR PANEL 13 MM                | COLOUR | QTY/BOX | QTY/<br>CARTON | ART. | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|  | ■      | 12      | 72             | 8600 | <b>REF. 86 - ADJUSTABLE REINFORCED PANEL HOLDER 130-170 MM - 13 MM</b><br>/ adjustable polyamide foot for height under panel between 130 mm and 170 mm<br>/ suitable for a panel thickness of 13 mm<br>/ also suitable for a panel thickness of 10 mm provided a set of intermediate pieces ref. 78 is used<br>/ delivered with 2 polyamide cover caps<br>/ 1 cover cap is provided with 2 cylindrical sleeves to secure the screws<br>/ the screws are invisible after the installation of the second cover cap on the panel holder (click system)<br>/ polyamide base with four 7 mm holes for attachment to the floor and Ø 71 mm polyamide cover cap                                                             |
|                                                                                       | □      | 12      | 72             | 8610 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 8620 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                       | ■      | 12      | 72             | 8640 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

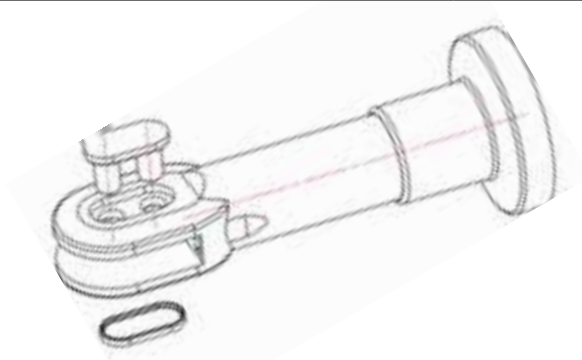

| DUAL DOOR CUBICLE LOCK                                                             | COLOUR                                                                              | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                                          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|------------|------|--------------------------------------------------------------------------------------------------------------------------------------|
|  |  | 10      | 60         | 9000 | <b>REF. 90 - DUAL DOOR CUBICLE LOCK</b>                                                                                              |
|                                                                                    |  | 10      | 60         | 9010 | / set of 2 cubicle locks                                                                                                             |
|                                                                                    |  | 10      | 60         | 9020 | / double door lock-system to close 2 opposite doors at the same time.                                                                |
|                                                                                    |  | 10      | 60         | 9040 | / polyamide twist lock with "free" indication in white and "occupied" indication in red                                              |
|                                                                                    |                                                                                     |         |            |      |                                                                                                                                      |
|                                                                                    |                                                                                     |         |            |      | / suitable for overlay doors with a thickness of 10 mm or 13 mm                                                                      |
|                                                                                    |                                                                                     |         |            |      | / use with 14mm lock adapter ref. 67 for 10 mm thick overlay door and with 17 mm lock - adapter ref. 68 for 13 mm thick overlay door |
|                                                                                    |                                                                                     |         |            |      | / 360° rotational angle with soft stop every 90°                                                                                     |
|                                                                                    |                                                                                     |         |            |      | / can be unlocked from the outside using an 8 mm square socket key ref. 1134                                                         |
|                                                                                    |                                                                                     |         |            |      | / supplied with 2 stainless steel cross-recessed countersunk head M4 x 35 mm screws                                                  |

| HINGE ADAPTER FOR OVERLAY DOORS 13 MM                                                 |                                                                                       | COLOUR | QTY/BOX | QTY/CARTON | ART.                                                                                                                                                                                 | DESCRIPTION |  |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|
|  |  | 60     | 240     | 7700       | <b>REF. 77 - HINGE ADAPTER FOR OVERLAY DOORS 13 MM</b><br>/ 17 mm thick polyamide adapter<br>/ on 13 mm overlay doors is mounted between the hinges ref. 56/57/58/59 and fixed panel |             |  |
|                                                                                       |  | 60     | 240     | 7710       |                                                                                                                                                                                      |             |  |
|                                                                                       |  | 60     | 240     | 7720       |                                                                                                                                                                                      |             |  |
|                                                                                       |  | 60     | 240     | 7730       |                                                                                                                                                                                      |             |  |
|                                                                                       |  | 60     | 240     | 7740       |                                                                                                                                                                                      |             |  |
|                                                                                       |  | 60     | 240     | 7750       |                                                                                                                                                                                      |             |  |
|                                                                                       |  | 60     | 240     | 7760       |                                                                                                                                                                                      |             |  |

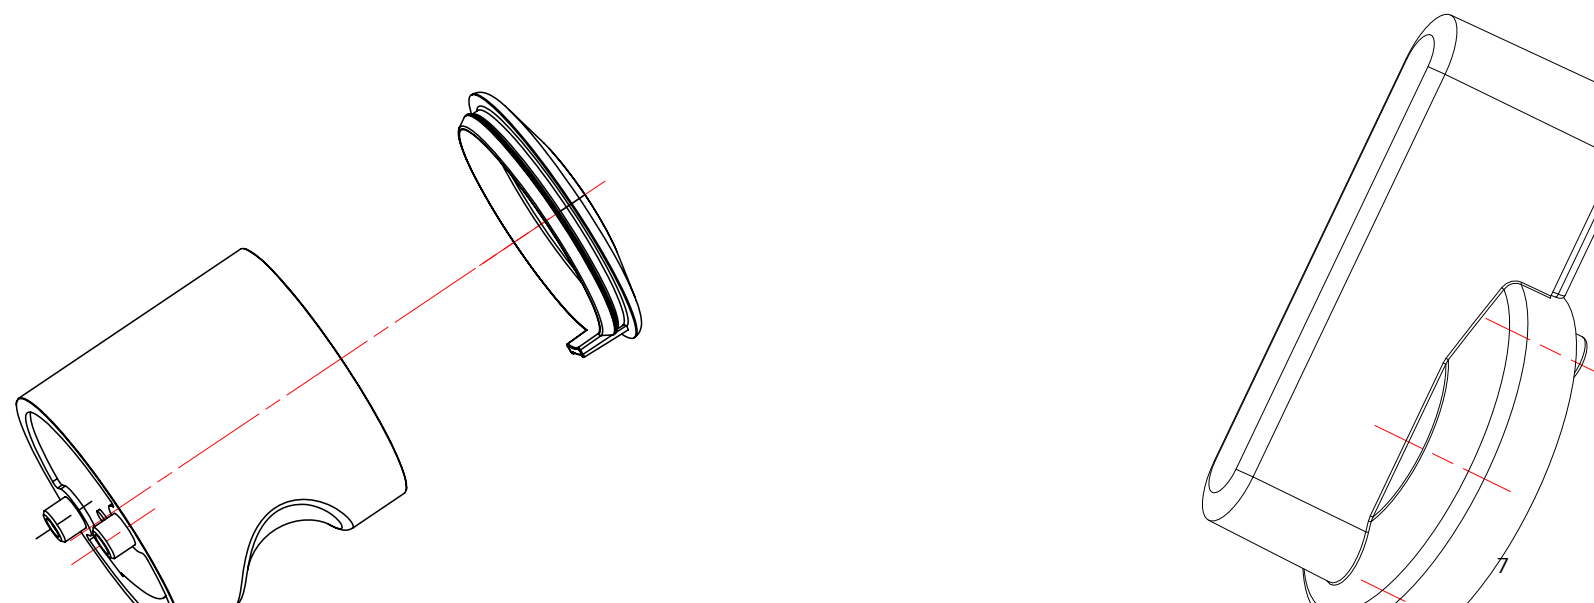


| STANDARD HINGE R                                                                  | COLOUR                                                                            | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                                           |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|------------|------|---------------------------------------------------------------------------------------------------------------------------------------|
|  |  | 30      | 90         | 5600 | <b>REF. 56 - STANDARD RIGHT HINGE</b>                                                                                                 |
|                                                                                   |  | 30      | 90         | 5610 | / right hinge in polyamide, inner hinge is reinforced with a galvanized steel plate                                                   |
|                                                                                   |  | 30      | 90         | 5620 | / mounted on the right side of the door                                                                                               |
|                                                                                   |  | 30      | 90         | 5630 | / grease lubricated stainless steel Ø 12 mm inner pin                                                                                 |
|                                                                                   |  | 30      | 90         | 5640 | / 2 countersunk 6 mm mounting holes on each side of the hinge                                                                         |
|                                                                                   |  | 30      | 90         | 5650 | / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)                 |
|                                                                                   |  | 30      | 90         | 5660 | / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm                                                               |
|                                                                                   |                                                                                   |         |            |      | / use with 14 mm hinge adapter ref. 66 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 77 for 13 mm thick overlay door |
|                                                                                   |                                                                                   |         |            |      | / maximum load capacity is 40 kg per hinge                                                                                            |

| STANDARD HINGE L                                                                  | COLOUR                                                                            | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                                           |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|------------|------|---------------------------------------------------------------------------------------------------------------------------------------|
|  |  | 30      | 90         | 5700 | <b>REF. 57 - STANDARD LEFT HINGE</b>                                                                                                  |
|                                                                                   |  | 30      | 90         | 5710 | / left hinge in polyamide, inner hinge is reinforced with a galvanized steel plate                                                    |
|                                                                                   |  | 30      | 90         | 5720 | / mounted on the left side of the door                                                                                                |
|                                                                                   |  | 30      | 90         | 5730 | / grease lubricated stainless steel Ø 12 mm inner pin                                                                                 |
|                                                                                   |  | 30      | 90         | 5740 | / 2 countersunk 6 mm mounting holes on each side of the hinge                                                                         |
|                                                                                   |  | 30      | 90         | 5750 | / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)                 |
|                                                                                   |  | 30      | 90         | 5760 | / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm                                                               |
|                                                                                   |                                                                                   |         |            |      | / use with 14 mm hinge adapter ref. 66 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 77 for 13 mm thick overlay door |
|                                                                                   |                                                                                   |         |            |      | / maximum load capacity is 40 kg per hinge                                                                                            |

| SPRING HINGE R                                                                      | COLOUR                                                                              | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                                                                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |   | 15      | 90         | 5800 | <b>REF. 58 - RIGHT SPRING HINGE</b>                                                                                                                                      |
|                                                                                     |  | 15      | 90         | 5810 | / right spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.                                                                              |
|                                                                                     |  | 15      | 90         | 5820 | / mounted on the right side of the door                                                                                                                                  |
|                                                                                     |  | 15      | 90         | 5830 | / grease lubricated stainless steel Ø 12 mm inner pin                                                                                                                    |
|                                                                                     |  | 15      | 90         | 5840 | / galvanized steel spring in the hollow pin                                                                                                                              |
|                                                                                     |  | 15      | 90         | 5850 | / the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5 mm Allen key |
|                                                                                     |  | 15      | 90         | 5860 | / 2 countersunk 6 mm mounting holes on each side of the hinge                                                                                                            |
|                                                                                     |                                                                                     |         |            |      | / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)                                                    |
|                                                                                     |                                                                                     |         |            |      | / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm                                                                                                  |
|                                                                                     |                                                                                     |         |            |      | / use with 14 mm hinge adapter ref. 66 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 77 for 13 mm thick overlay door                                    |
|                                                                                     |                                                                                     |         |            |      | / maximum load capacity is 40 kg per hinge                                                                                                                               |

| SPRING HINGE L                                                                      | COLOUR                                                                              | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                                                                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |  | 15      | 90         | 5900 | <b>REF. 59 - LEFT SPRING HINGE</b>                                                                                                                                       |
|                                                                                     |  | 15      | 90         | 5910 | / left spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.                                                                               |
|                                                                                     |  | 15      | 90         | 5920 | / mounted on the left side of the door                                                                                                                                   |
|                                                                                     |  | 15      | 90         | 5930 | / grease lubricated stainless steel Ø 12 mm inner pin                                                                                                                    |
|                                                                                     |  | 15      | 90         | 5940 | / galvanized steel spring in the hollow pin                                                                                                                              |
|                                                                                     |  | 15      | 90         | 5950 | / the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5 mm Allen key |
|                                                                                     |  | 15      | 90         | 5960 | / 2 countersunk 6 mm mounting holes on each side of the hinge                                                                                                            |
|                                                                                     |                                                                                     |         |            |      | / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)                                                    |
|                                                                                     |                                                                                     |         |            |      | / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm                                                                                                  |
|                                                                                     |                                                                                     |         |            |      | / use with 14 mm hinge adapter ref. 66 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 77 for 13 mm thick overlay door                                    |
|                                                                                     |                                                                                     |         |            |      | / maximum load capacity is 40 kg per hinge                                                                                                                               |


SCREWS FOR MOUNTING HINGES  
10 & 13 mm panel, item 13832\*  
\*For mounting directly onto the panel (no adapter)

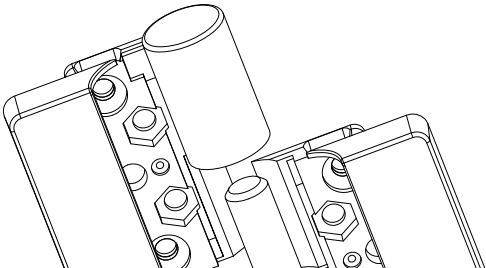


| SPRING HINGE R UNLOCKED                                                             | COLOUR                                                                              | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                                                                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |  | 15      | 90         | 7100 | <b>REF. 71 - SPRING HINGE R - UNLOCKED</b>                                                                                                                               |
|                                                                                     |  | 15      | 90         | 7110 | / right spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.                                                                              |
|                                                                                     |  | 15      | 90         | 7120 | / mounted on the right side of the door                                                                                                                                  |
|                                                                                     |  | 15      | 90         | 7140 | / grease lubricated stainless steel Ø 12 mm inner pin                                                                                                                    |
|                                                                                     |                                                                                     |         |            |      | / galvanized steel spring in the hollow pin                                                                                                                              |
|                                                                                     |                                                                                     |         |            |      | / the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5 mm Allen key |
|                                                                                     |                                                                                     |         |            |      | / 2 countersunk 6 mm mounting holes on each side of the hinge                                                                                                            |
|                                                                                     |                                                                                     |         |            |      | / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)                                                    |
|                                                                                     |                                                                                     |         |            |      | / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm                                                                                                  |
|                                                                                     |                                                                                     |         |            |      | / use with 14 mm hinge adapter ref. 66 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 77 for 13 mm thick overlay door                                    |
|                                                                                     |                                                                                     |         |            |      | / maximum load capacity is 40 kg per hinge                                                                                                                               |

| SPRING HINGE L UNLOCKED                                                             | COLOUR                                                                              | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                                                                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |  | 15      | 90         | 7200 | <b>REF. 72 - SPRING HINGE L - UNLOCKED</b>                                                                                                                               |
|                                                                                     |  | 15      | 90         | 7210 | / left spring hinge in polyamide, inner hinge is reinforced with a galvanized steel plate.                                                                               |
|                                                                                     |  | 15      | 90         | 7220 | / mounted on the left side of the door                                                                                                                                   |
|                                                                                     |  | 15      | 90         | 7240 | / grease lubricated stainless steel Ø 12 mm inner pin                                                                                                                    |
|                                                                                     |                                                                                     |         |            |      | / galvanized steel spring in the hollow pin                                                                                                                              |
|                                                                                     |                                                                                     |         |            |      | / the tension of the spring is adjusted to the upper side of the hinge with the help of a flat screw driver and locked to the side of the hinge using a 2.5 mm Allen key |
|                                                                                     |                                                                                     |         |            |      | / 2 countersunk 6 mm mounting holes on each side of the hinge                                                                                                            |
|                                                                                     |                                                                                     |         |            |      | / the screws (not included) are invisible once the polyamide cover caps have been fitted on the hinges (click system)                                                    |
|                                                                                     |                                                                                     |         |            |      | / suitable for panels fitted in-line with a thickness of 10 mm or 13 mm                                                                                                  |
|                                                                                     |                                                                                     |         |            |      | / use with 14 mm hinge adapter ref. 66 for 10mm thick overlay door and with 17 mm hinge adapter ref. 77 for 13 mm thick overlay door                                     |
|                                                                                     |                                                                                     |         |            |      | / maximum load capacity is 40 kg per hinge                                                                                                                               |

| ANGLE FIXTURE                                                                       |                                                                                     | COLOUR      | QTY/BOX | QTY/CARTON                                                                                                                                    | ART.                                                                                                                            | DESCRIPTION |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------|
|    |    | 50          | 200     | 6200                                                                                                                                          | REF. 62 - ANGLE FIXTURE                                                                                                         |             |
|                                                                                     |    | 50          | 200     | 6210                                                                                                                                          | / polyamide corner piece for the attachment of the side partition to the wall                                                   |             |
|                                                                                     |    | 50          | 200     | 6220                                                                                                                                          | / 2 countersunk Ø 5 mm holes                                                                                                    |             |
|                                                                                     |    | 50          | 200     | 6230                                                                                                                                          | / the screws (not included) are invisible once the polyamide cover caps have been fitted on the corner pieces (click system)    |             |
|                                                                                     |    | 50          | 200     | 6240                                                                                                                                          |                                                                                                                                 |             |
|                                                                                     |    | 50          | 200     | 6250                                                                                                                                          |                                                                                                                                 |             |
|                                                                                     |    | 50          | 200     | 6260                                                                                                                                          |                                                                                                                                 |             |
| PANEL CLAMP TUBE FOR PANEL 13 MM                                                    |                                                                                     | COLOUR      | QTY/BOX | QTY/CARTON                                                                                                                                    | ART.                                                                                                                            | DESCRIPTION |
|    |    | 20          | 120     | 6300                                                                                                                                          | REF. 63 - 34 MM PANEL CLAMP TUBE FOR 13 MM PANEL                                                                                |             |
|                                                                                     |    | 20          | 120     | 6310                                                                                                                                          | / polyamide panel clamp to mount 12/13 mm panels to Ø 34 mm tubes                                                               |             |
|                                                                                     |    | 20          | 120     | 6320                                                                                                                                          | / delivered with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20 mm and 2 polyamide cover caps |             |
|                                                                                     |    | 20          | 120     | 6330                                                                                                                                          | / 1 cover cap is provided with 1 cylindrical sleeve to secure the screw                                                         |             |
|                                                                                     |    | 20          | 120     | 6340                                                                                                                                          | / the screw is invisible after the installation of the second cover cap on the panel clamp (click system)                       |             |
|                                                                                     |    | 20          | 120     | 6350                                                                                                                                          |                                                                                                                                 |             |
|                                                                                     |    | 20          | 120     | 6360                                                                                                                                          |                                                                                                                                 |             |
| PANEL-TO-WALL CLAMP                                                                 |                                                                                     | COLOUR      | QTY/BOX | QTY/CARTON                                                                                                                                    | ART.                                                                                                                            | DESCRIPTION |
|   |    | 25          | 100     | 6400                                                                                                                                          | REF. 64 - 13 MM PANEL-TO-WALL CLAMP                                                                                             |             |
|                                                                                     |    | 25          | 100     | 6410                                                                                                                                          | / polyamide panel clamp to mount 12/13 mm panels to the wall                                                                    |             |
|                                                                                     |    | 25          | 100     | 6420                                                                                                                                          | / 1 countersunk Ø 5 mm hole to mount the panel clamp to the wall                                                                |             |
|                                                                                     |    | 25          | 100     | 6430                                                                                                                                          | / comes with 2 stainless steel self-tapping cross-recessed countersunk head screws Ø 4.8 x 20 mm and 2 polyamide cover caps     |             |
|                                                                                     |   | 25          | 100     | 6440                                                                                                                                          | / 1 cover cap is provided with 1 cylindrical sleeve to secure the screw                                                         |             |
|                                                                                     |  | 25          | 100     | 6450                                                                                                                                          | / the screw is invisible after the installation of the second cover cap on the panel clamp (click system)                       |             |
|                                                                                     |  | 25          | 100     | 6460                                                                                                                                          |                                                                                                                                 |             |
| SET OF INTERMEDIATE PIECES FOR ADJUSTABLE FOOT 140-170MM                            |                                                                                     | COLOUR      | QTY/BOX | ART.                                                                                                                                          | DESCRIPTION                                                                                                                     |             |
|  |  | 12 sets/bag | 7800    | REF. 78 - SET OF SPACES FOR ADJUSTABLE FOOT 140-170MM - FOR ADJUSTING PANEL THICKNESS FROM 13MM TO 10MM                                       |                                                                                                                                 |             |
|                                                                                     |  | 12 sets/bag | 7810    | / set of 2 polyamide intermediate pieces, each 1,5 mm thick                                                                                   |                                                                                                                                 |             |
|                                                                                     |  | 12 sets/bag | 7820    | / is used with 13 mm panel holder ref. 50 for 10 mm thick panels                                                                              |                                                                                                                                 |             |
|                                                                                     |  | 12 sets/bag | 7830    | / the intermediate pieces are inserted between the panel holder and the panel and maintained in position by the cover cap of the panel holder |                                                                                                                                 |             |
|                                                                                     |  | 12 sets/bag | 7840    |                                                                                                                                               |                                                                                                                                 |             |
|                                                                                     |  | 12 sets/bag | 7850    |                                                                                                                                               |                                                                                                                                 |             |
|                                                                                     |  | 12 sets/bag | 7860    |                                                                                                                                               |                                                                                                                                 |             |
| PANEL CLAMP ADAPTER SET TO INCREASE PANEL THICKNESS FROM 13 MM TO 10 MM             |                                                                                     | COLOUR      | QTY/BOX | ART.                                                                                                                                          | DESCRIPTION                                                                                                                     |             |
|  |  | 20 sets/bag | 7900    | REF. 79 - PANEL CLAMP SET TO INCREASE PANEL THICKNESS FROM 13 MM TO 10 MM                                                                     |                                                                                                                                 |             |
|                                                                                     |  | 20 sets/bag | 7910    | / set of 2 polyamide intermediate pieces, each 1.5 mm thick                                                                                   |                                                                                                                                 |             |
|                                                                                     |  | 20 sets/bag | 7920    | / is used with panel clamps ref. 63 and 64 for 10 mm thick panels                                                                             |                                                                                                                                 |             |
|                                                                                     |  | 20 sets/bag | 7930    | / the intermediate pieces are inserted between the panel clamp and the panel and maintained in position by the cover cap of the panel clamp   |                                                                                                                                 |             |
|                                                                                     |  | 20 sets/bag | 7940    |                                                                                                                                               |                                                                                                                                 |             |
|                                                                                     |  | 20 sets/bag | 7950    |                                                                                                                                               |                                                                                                                                 |             |
|                                                                                     |  | 20 sets/bag | 7960    |                                                                                                                                               |                                                                                                                                 |             |

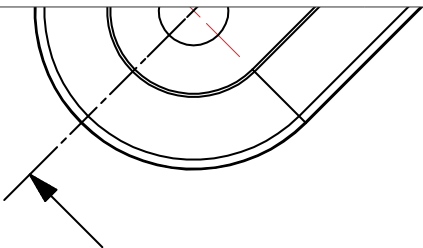

| SINGLE CLOTHES HOOK                                                                   | COLOUR                                                                                | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                               |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------|------------|------|---------------------------------------------------------------------------------------------------------------------------|
|    |    | 50      | 200        | 6000 | REF. 60 - SINGLE CLOTHES HOOK                                                                                             |
|                                                                                       |    | 50      | 200        | 6010 | / polyamide single clothes hook                                                                                           |
|                                                                                       |    | 50      | 200        | 6020 | / base with 2 countersunk Ø 4.5 mm holes                                                                                  |
|                                                                                       |    | 50      | 200        | 6030 | / the screws (not included) are invisible once the polyamide cover cap has been fitted on the clothes hook (click system) |
|                                                                                       |    | 50      | 200        | 6040 |                                                                                                                           |
|                                                                                       |    | 50      | 200        | 6050 |                                                                                                                           |
|                                                                                       |    | 50      | 200        | 6060 |                                                                                                                           |
| KLEERHAAK DUBBEL                                                                      | COLOUR                                                                                | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                               |
|    |    | 25      | 100        | 6100 | REF. 61 - DOUBLE CLOTHES HOOK                                                                                             |
|                                                                                       |    | 25      | 100        | 6110 | / polyamide double clothes hook                                                                                           |
|                                                                                       |    | 25      | 100        | 6120 | / base with 2 countersunk Ø 4.5 mm holes                                                                                  |
|                                                                                       |    | 25      | 100        | 6130 | / the screws (not included) are invisible once the polyamide cover cap has been fitted on the clothes hook (click system) |
|                                                                                       |    | 25      | 100        | 6140 |                                                                                                                           |
|                                                                                       |    | 25      | 100        | 6150 |                                                                                                                           |
|                                                                                       |    | 25      | 100        | 6160 |                                                                                                                           |
| DOUBLE CLOTHES HOOK ROTATING                                                          | COLOUR                                                                                | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                               |
|   |    | 25      | 100        | 8800 | REF. 88 - DOUBLE CLOTHES HOOK ROTATING                                                                                    |
|                                                                                       |    | 25      | 100        | 8810 | / polyamide double clothes hook rotating                                                                                  |
|                                                                                       |    | 25      | 100        | 8820 | / base with 6 countersunk Ø 4.5 mm holes                                                                                  |
|                                                                                       |    | 25      | 100        | 8840 | / the screws (not included) are invisible once the polyamide cover cap has been fitted on the clothes hook (click system) |
| TOILET ROLL HOLDER                                                                    | COLOUR                                                                                | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                               |
|  |  | 10      | 40         | 6500 | REF. 65 - TOILET ROLL HOLDER                                                                                              |
|                                                                                       |  | 10      | 40         | 6510 | / polyamide toilet roll holder with hinged holder                                                                         |
|                                                                                       |  | 10      | 40         | 6520 | / base with 2 countersunk Ø 5 mm holes                                                                                    |
|                                                                                       |  | 10      | 40         | 6530 | / the screws (not included) are invisible once the polyamide cover cap has been fitted on the roll holder (click system)  |
|                                                                                       |  | 10      | 40         | 6540 |                                                                                                                           |
|                                                                                       |  | 10      | 40         | 6550 |                                                                                                                           |
|                                                                                       |  | 10      | 40         | 6560 |                                                                                                                           |
| ROSETTE                                                                               | COLOUR                                                                                | QTY/BOX | QTY/CARTON | ART. | DESCRIPTION                                                                                                               |
|  |  | 20      | 120        | 8900 | REF. 89 - ROSETTE                                                                                                         |
|                                                                                       |  | 20      | 120        | 8910 | / base with 4 countersunk Ø 7 mm                                                                                          |
|                                                                                       |  | 20      | 120        | 8920 | / the screws (not included) are invisible once the polyamide cover cap has been fitted on the rosette (click system)      |
|                                                                                       |  | 20      | 120        | 8940 |                                                                                                                           |



 RAL 7043 - TRAFFIC GREY B  
 RAL 7038 - AGATE GREY

 RAL 9010 - PURE WHITE  
 RAL 1021 - RAPESEED YELLOW

 RAL 9005 - JET BLACK  
 RAL 3003 - RUBY RED

 RAL 5003 - SAPPHIRE BLUE

ALUMINIUM  
SILVER LINE

The **CUBILOX** Aluminium range is made of high quality aluminium, machined with extreme precision and and natural anodized to become the silver look.

The **CUBILOX** Aluminium range includes all hardware for various panel thicknesses with outward- or inward- opening doors, for full in line doors as well as overlay doors.

Cubicles previously fitted with NYLON door fittings hardware can be converted to aluminium silverline without additional drilling.



- ONLY USE IN DRY ENVIRONMENTS -

| ADJUSTABLE PANEL HOLDER 90-130MM-10MM                                                 | QTY/BOX | QTY/ CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------|---------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 12      | 72          | <b>REF. 2678 - ADJUSTABLE PANEL HOLDER 90 - 130 MM - 10 MM</b><br>/ base in <b>galvanized steel</b> with 6 x Ø 7mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 90 mm and 130 mm<br>/ suitable for panels with thickness of 10 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel           |
| ADJUSTABLE PANEL HOLDER 140-170MM-13MM                                                | QTY/BOX | QTY/ CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|    | 12      | 72          | <b>REF. 2009 - ADJUSTABLE PANEL HOLDER 140 - 170 MM - 13 MM</b><br>/ base in <b>galvanized steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 140 mm and 170 mm<br>/ suitable for a panel thickness of 13 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel            |
| ADJUSTABLE,REINFORCED PANEL HOLDER 90-130MM - 10MM                                    | QTY/BOX | QTY/ CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|  | 12      | 72          | <b>REF. 3107 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 10 MM</b><br>/ base in <b>stainless steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 90 mm and 130 mm<br>/ suitable for a panel thickness of 10 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel    |
| ADJUSTABLE,REINFORCED PANEL HOLDER 90-130MM - 13MM                                    | QTY/BOX | QTY/ CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|  | 12      | 72          | <b>REF. 3510 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 13 MM</b><br>/ base in <b>stainless steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 90 mm and 130 mm<br>/ suitable for a panel thickness of 12/13 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |
| ADJUSTABLE,REINFORCED PANEL HOLDER 140-170MM - 13 MM                                  | QTY/BOX | QTY/ CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|  | 12      | 72          | <b>REF. 3108 - ADJUSTABLE REINFORCED PANEL HOLDER 140 - 170 MM - 13 MM</b><br>/ base in <b>stainless steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 140 mm and 170 mm<br>/ suitable for a panel thickness of 13 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel  |

feet to be mounted with screws (2x) item 13831 (5x12)

- ONLY USE IN DRY ENVIRONMENTS -

| PANEL HOLDER<br>90 - 130 MM ->24 MM<br>WITH HIDDEN MOUNTING<br>PLATE                                                                                                    | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | 12      | 72         | <b>REF. 14708 - PANEL HOLDER 90 - 130 MM -&gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 90 mm and 130 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel   |
| PANEL HOLDER<br>140 - 170 MM ->24 MM<br>WITH HIDDEN MOUNTING<br>PLATE                                                                                                   | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|      | 12      | 72         | <b>REF. 14709 - PANEL HOLDER 140 - 170 MM -&gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 140 mm and 170 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |
| PANEL HOLDER<br>170 - 210 MM ->24 MM<br>WITH HIDDEN MOUNTING<br>PLATE                                                                                                   | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|   | 12      | 72         | <b>REF. 14767 - PANEL HOLDER 170 - 210 MM -&gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in silver anodized aluminium for height under panel between 90 mm and 130 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel  |

| SET OF 2 DOORKNOBS<br>30 MM                                                           | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 20      | 120        | <b>REF. 2257 - SET OF TWO DOORKNOBS 30 MM</b><br>/ set of 2 Ø 30 mm doorknobs in anodized aluminium (male-female)<br>/ suitable for a panel thicknesses of 10 mm and 13 mm<br>/ male knob is provided with a stainless steel M8 threaded rod<br>/ female knob has an inner thread of M8 and is locked laterally using a 3 mm Allen key                                                                                                                                                                                                                |
| DOOR LOCK WITH KNOB<br>13 MM                                                          | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|    | 20      | 60         | <b>REF. 2120 - DOOR LOCK WITH INTEGRATED KNOB 13 MM</b><br>/ only for doors with outward opening<br>/ silver anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ door lock shape specially adapted to also serve as a doorknob<br>/ 57 mm outer diameter<br>/ suitable for doors fitted in-line with a thickness of 10 mm or 13 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2x DIN 965 A2 M4x60 |
| DOORLOCK STANDARD<br>13 MM - IN LINE                                                  | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|    | 10      | 60         | <b>REF. 2607 - DOOR LOCK STANDARD 13 MM - IN LINE</b><br>/ silver anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for doors fitted in-line with a thickness of 10 mm or 13 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2x DIN 965 A2 M4x30                                                                                                               |
| DOORLOCK STANDARD<br>13 MM + 17MM - OVERLAY                                           | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  | 10      | 60         | <b>REF. 3005 - DOOR LOCK STANDARD 13 MM + 17 MM - OVERLAY</b><br>/ silver anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for overlay doors with a thickness of 13 mm because of the integrated adapter of 17 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2x DIN 965 A2 M4x50                                                                            |
| DOORLOCK STANDARD<br>10 MM - IN LINE                                                  | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  | 10      | 60         | <b>REF. 3003 - DOOR LOCK STANDARD 10 MM - IN LINE</b><br>/ silver anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for doors fitted in-line with a thickness of 10 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2x DIN 965 A2 M4x30                                                                                                                        |
| DOORLOCK STANDARD<br>10 MM + 14 MM - OVERLAY                                          | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  | 10      | 60         | <b>REF. 3004 - DOOR LOCK STANDARD 10 MM + 14 MM - OVERLAY</b><br>/ silver anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for overlay doors with a thickness of 10mm because of the integrated adapter of 14 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2x DIN 965 A2 M4x45                                                                             |

- ONLY USE IN DRY ENVIRONMENTS -

| RIGHT HINGE + COVER CAPS                                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 30      | 90         | <b>REF. 2115 - RIGHT HINGE WITH COVER CAPS</b><br>/ right hinge in silver anodized aluminium<br>/ mounted on the right side of the door<br>/ grease lubricated stainless steel Ø 12 mm inner pin<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge                                                                                                                                                                                                                                       |
| LEFT HINGE + COVER CAPS                                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|    | 30      | 90         | <b>REF. 1913 - LEFT HINGE WITH COVER CAPS</b><br>/ left hinge in silver anodized aluminium<br>/ mounted on the left side of the door<br>/ grease lubricated stainless steel Ø 12 mm inner pin<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ the maximum load capacity is 40 kg per hinge                                                                                                                                                                                                                                      |
| RIGHT SPRING HINGE + COVER CAPS                                                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|  | 15      | 90         | <b>REF. 2116 - RIGHT SPRING HINGE WITH COVER CAPS</b><br>/ right spring hinge in silver anodized aluminium<br>/ mounted on the right side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin with stainless steel spring in the hollow pin<br>/ the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ the maximum load capacity is 40 kg per hinge |
| LEFT SPRING HINGE + COVER CAPS                                                      | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|  | 15      | 90         | <b>REF. 1914 - LEFT SPRING HINGE WITH COVER CAPS</b><br>/ left spring hinge in silver anodized aluminium<br>/ mounted on the left side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin with stainless steel spring in the hollow pin<br>/ the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge        |

SCREWS FOR MOUNTING HINGES  
10 mm panel, item 15186\* (5x10)  
13 mm panel, item 13831\* (5x12)  
\*For mounting directly onto the panel (no adapter)

| HINGE ADAPTER FOR 10 MM OVERLAY DOORS                                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 30      | 120        | <b>REF. 2681 - 14 MM HINGE ADAPTER</b><br>/ 14 mm thick adapter in silver anodized aluminium<br>/ used for 10 mm overlay doors is mounted between the hinges ref. 2113/1911/2114/1912/2115/1913/2116/1914 and the fixed panel                                                                      |
| HINGE ADAPTER FOR 13 MM OVERLAY DOORS                                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |
|    | 30      | 120        | <b>REF. 2695 - 17 MM HINGE ADAPTER</b><br>/ 17 mm thick adapter in silver anodized aluminium<br>/ used for 13 mm overlay doors, mounted between the hinges ref. 2113/1911/2114/1912/2115/1913/2116/1914 and the fixed panel                                                                        |
| CLOTHES HOOK                                                                          | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |
|   | 50      | 200        | <b>REF. 2258 - CLOTHES HOOK</b><br>/ single clothes hook in silver anodized aluminium<br>/ 2 countersunk Ø 5mm holes<br><br>to be mounted with screws (2x) item 15185 (5x16) for panel 10 mm and panel 13 mm                                                                                       |
| PANEL-TO-WALL CLAMP 10 MM                                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |
|  | 25      | 100        | <b>REF. 4815 PANEL-TO-WALL CLAMP 10 MM</b><br>/ silver anodized aluminium<br>/ 1 countersunk Ø 5,5 mm hole for attachment to the panel<br>/ 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall<br><br>to be mounted with screws (2x) item 13831 (5x12) for panel 10 mm and panel 13 mm |
| PANEL-TO-WALL CLAMP 13 MM                                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |
|  | 25      | 100        | <b>REF. 4816 PANEL-TO-WALL CLAMP 13 MM</b><br>/ silver anodized aluminium<br>/ 1 countersunk Ø 5,5 mm hole for attachment to the panel<br>/ 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall<br><br>to be mounted with screws (2x) item 13831 (5x12) for panel 10 mm and panel 13 mm |

| ANGLE FIXTURE WITH 2 COUNTERSUNK HOLES                                              | QTY/CARTON     | DESCRIPTION                                                                                                                                                                                                                                                         |  |
|-------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|    | 60             | <b>REF. 2430 - ANGLE FIXTURE WITH 2 COUNTERSUNK HOLES</b><br>/ silver anodized aluminium for the attachment of the side partition to the wall<br>/ 2 countersunk holes Ø 6 mm                                                                                       |  |
| ANGLE FIXTURE WITH 1 COUNTERSUNK HOLE AND 1 SLOT HOLE                               | QTY/CARTON     | DESCRIPTION                                                                                                                                                                                                                                                         |  |
|    | 60             | <b>REF. 3178 - ANGLE FIXTURE WITH 1 COUNTERSUNK HOLE AND 1 SLOT HOLE</b><br>/ silver anodized aluminium for the attachment of the side partition to the wall<br>/ 1 countersunk hole Ø 6 mm<br>/ 1 slot hole                                                        |  |
| PANEL CLAMP TUBE FOR PANEL 13 M SOLID                                               | AANTAL/ KARTON | BESCHRIJVING                                                                                                                                                                                                                                                        |  |
|   | 50             | <b>REF. 2747 - PANEL CLAMP TUBE FOR PANEL 13 MM ANODIZED (SOLID)</b><br><b>REF. 1257 - PANEL CLAMP TUBE FOR PANEL 13 MM MILL FINISH ALU (SOLID)</b><br><br>/ silver anodized aluminium<br>/ for a panel of 13 mm<br>/ for a tube of Ø 35 mm<br>/ for front wall use |  |
| PANEL CLAMP TUBE FOR PANEL 13 M ROTATING                                            | AANTAL/ KARTON | BESCHRIJVING                                                                                                                                                                                                                                                        |  |
|  | 50             | <b>REF. 3303 - PANEL CLAMP TUBE FOR PANEL 13 MM ANODIZED (ROTATING)</b><br>/ silver anodized aluminium<br>/ for a panel of 13 mm<br>/ for a tube of Ø 35 mm<br>/ for side wall use                                                                                  |  |

ALUMINIUM  
BLACK LINE

The CUBILOX Aluminium range is made of high quality aluminium, machined with extreme precision and and natural anodized to become the silver look.

The CUBILOX Aluminium range includes all hardware for various panel thicknesses with outward- or inward- opening doors, for full in line doors as well as overlay doors.

Cubicles fitted previously with NYLON door hardware can be converted to aluminium without additional drilling.

- ONLY USE IN DRY ENVIRONMENTS -

| ADJUSTABLE PANEL HOLDER 90-130MM-10MM                                               | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
|-------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|    | 12      | 72         | <b>REF. 12000 - ADJUSTABLE PANEL HOLDER 90 - 130 MM - 10 MM</b><br>/ base in <b>galvanized steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in black anodized aluminium for height under panel between 90 mm and 130 mm<br>/ suitable for panels with thickness of 10 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel           |  |
| ADJUSTABLE PANEL HOLDER 140-170MM-13MM                                              | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
|    | 12      | 72         | <b>REF. 12001 - ADJUSTABLE PANEL HOLDER 140 - 170 MM - 13 MM</b><br>/ base in <b>galvanized steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in black anodized aluminium for height under panel between 140 mm and 170 mm<br>/ suitable for panels with thickness of 10 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel         |  |
| ADJUSTABLE, REINFORCED PANEL HOLDER 90-130MM - 10MM                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
|  | 12      | 72         | <b>REF. 12002 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 10 MM</b><br>/ base in <b>stainless steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in black anodized aluminium for height under panel between 90 mm and 130 mm<br>/ suitable for panels with thickness of 10 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |  |
| ADJUSTABLE, REINFORCED PANEL HOLDER 90-130MM - 13MM                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
|  | 12      | 72         | <b>REF. 12003 - ADJUSTABLE REINFORCED PANEL HOLDER 90 - 130 MM - 13 MM</b><br>/ base in <b>stainless steel</b> with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in black anodized aluminium for height under panel between 90 mm and 130 mm<br>/ suitable for panels with thickness of 13 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |  |
| ADJUSTABLE, REINFORCED PANEL HOLDER 140-170MM - 13 MM                               | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |
|  | 12      | 72         | <b>REF. 12004 - ADJUSTABLE REINFORCED PANEL HOLDER 140 - 170 MM - 13 MM</b><br>/ base in <b>stainless steel</b> with 6 Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in black anodized aluminium for height under panel between 140 mm and 170 mm<br>/ suitable for panels with thickness of 13 mm<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |  |

feet to be mounted with screws (2x) item 13831 (5x12)

| SET OF TWO DOORKNOBS 30 MM                                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
|---------------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|    | 20      | 120        | <b>REF. 12005 - SET OF TWO DOORKNOBS 30 MM</b><br>/ set of Ø 30 mm doorknobs in black anodized aluminium<br>/ suitable for panel with thicknesses between 10 mm and 13 mm<br>/ the male knob is provided with a stainless steel M8 threaded rod<br>/ the female knob has an inner thread of M8 and is locked laterally using a 3 mm Allen key                                                                                                                                                                                                                         |  |
| DOOR LOCK WITH KNOB 13 MM - IN LINE                                                   | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
|    | 20      | 60         | <b>REF. 12006 - DOOR LOCK WITH INTEGRATED KNOB 13 MM - IN LINE</b><br>/ only for doors with outward opening<br>/ black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ door lock shape specially adapted to also serve as a doorknob<br>/ 57 mm outer diameter<br>/ suitable for doors fitted in-line with a thickness of 10 mm or 13 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 45 mm |  |
| DOORLOCK STANDARD 13 MM - IN LINE                                                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
|    | 10      | 60         | <b>REF. 12007 - DOOR LOCK STANDARD 13 MM - IN LINE</b><br>/ black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for doors fitted in-line with a thickness of 13 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 30 mm                                                                                                                                   |  |
| DOORLOCK STANDARD 13 MM + 17MM - OVERLAY                                              | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
|  | 8       | 48         | <b>REF. 12008 - DOOR LOCK STANDARD 13 MM + 17 MM - OVERLAY</b><br>/ black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for overlay doors with a thickness of 13 mm because of the integrated adapter of 17 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 50 mm                                                                                      |  |
| DOORLOCK STANDARD 10 MM - IN LINE                                                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
|  | 10      | 60         | <b>REF. 12009 - DOOR LOCK STANDARD 10 MM - IN LINE</b><br>/ black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for doors fitted in-line with a thickness of 10 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 30 mm                                                                                                                                  |  |
| DOORLOCK STANDARD 10 MM + 14 MM - OVERLAY                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
|  | 10      | 60         | <b>REF. 12010 - DOOR LOCK STANDARD 10 MM + 14 MM - OVERLAY</b><br>/ black anodized aluminium twist lock with "free" indication in white and "occupied" indication in red<br>/ 57 mm outer diameter<br>/ suitable for overlay doors with a thickness of 10 mm because of the integrated adapter of 14 mm<br>/ 360° rotational angle with soft stop every 90°<br>/ can be unlocked from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 45 mm                                                                                      |  |

- ONLY USE IN DRY ENVIRONMENTS -

| RIGHT HINGE + COVER CAPS                                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
|-------------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|    | 30      | 90         | <b>REF. 12011 - RIGHT HINGE WITH COVER CAPS</b><br>/ right hinge in black anodized aluminium<br>/ mounted on the right side of the door<br>/ grease lubricated stainless steel Ø 12 mm inner pin<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge                                                                                                                                                                                                                        |  |
| LEFT HINGE + COVER CAPS                                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
|    | 30      | 90         | <b>REF. 12012 - LEFT HINGE WITH COVER CAPS</b><br>/ left hinge in black anodized aluminium<br>/ mounted on the left side of the door<br>/ grease lubricated stainless steel Ø 12 mm inner pin<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge                                                                                                                                                                                                                           |  |
| RIGHT SPRING HINGE + COVER CAPS                                                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
|  | 15      | 90         | <b>REF. 12013 - RIGHT SPRING HINGE WITH COVER CAPS</b><br>/ right spring hinge in black anodized aluminium<br>/ mounted on the right side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin with stainless steel spring insert<br>/ the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |  |
| LEFT SPRING HINGE + COVER CAPS                                                      | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
|  | 15      | 90         | <b>REF. 12014 - LEFT SPRING HINGE WITH COVER CAPS</b><br>/ left spring hinge in black anodized aluminium<br>/ mounted on the left side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin with stainless steel spring insert<br>/ the tension of the spring is adjusted to the upper side of the hinge with the help of a 6 mm Allen key and locked to the side of the hinge using a 2.5 mm Allen key<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible once the cover caps in anodized aluminium have been fitted onto the hinges using a 1.5 mm Allen key<br>/ suitable for panels fitted in-line with a thickness of 10 mm or 13 mm<br>/ use with 14 mm hinge adapter ref. 2681 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 2695 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge    |  |

SCREWS FOR MOUNTING HINGES  
10 mm panel, item 15186\* (5x10)  
13 mm panel, item 13831\* (5x12)  
\*For mounting directly onto the panel (no adapter)

| HINGE ADAPTER FOR 10 MM OVERLAY DOORS                                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |  |
|---------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|    | 30      | 120        | <b>REF. 12015 - 14 MM HINGE ADAPTER FOR 10 MM OVERLAY DOORS</b><br>/ 14 mm thick adapter in black anodized aluminium<br>/ used for 10 mm overlay doors, mounted between the hinges ref. 12011/12012/12013/12014 and the fixed panel                                                                |  |
| HINGE ADAPTER FOR 13 MM OVERLAY DOORS                                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |  |
|    | 30      | 120        | <b>REF. 12016 - 17 MM HINGE ADAPTER FOR 13 MM OVERLAY DOORS</b><br>/ 17 mm thick adapter in black anodized aluminium<br>/ used for 13 mm overlay doors, mounted between the hinges ref. 12011/12012/12013/12014 and the fixed panel                                                                |  |
| CLOTHES HOOK                                                                          | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |  |
|   | 50      | 200        | <b>REF. 12017 - CLOTHES HOOK</b><br>/ black anodized aluminium<br>/ 2 countersunk Ø 5mm holes<br><br>to be mounted with screws (2x) item 15185 (5x16) for panel 10 mm and panel 13 mm                                                                                                              |  |
| PANEL-TO-WALL CLAMP 10 MM                                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |  |
|  | 25      | 100        | <b>REF. 12018 PANEL-TO-WALL CLAMP 10 MM</b><br>/ black anodized aluminium<br>/ 1 countersunk Ø 5,5 mm hole for attachment to the panel<br>/ 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall<br><br>to be mounted with screws (2x) item 13831 (5x12) for panel 10 mm and panel 13 mm |  |
| PANEL-TO-WALL CLAMP 13 MM                                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                        |  |
|  | 25      | 100        | <b>REF. 12019 PANEL-TO-WALL CLAMP 13 MM</b><br>/ black anodized aluminium<br>/ 1 countersunk Ø 5,5 mm hole for attachment to the panel<br>/ 1 countersunk Ø 4 mm hole to mount the panel clamp to the wall<br><br>to be mounted with screws (2x) item 13831 (5x12) for panel 10 mm and panel 13 mm |  |

| ANGLE FIXTURE WITH 2 COUNTERSUNK HOLES                                            | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                  |  |
|-----------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | 60         | <b>REF. 12020 - ANGLE FIXTURE WITH 2 COUNTERSUNK HOLES</b><br>/ black anodized aluminium for the attachment of the side partition to the wall<br>/ 2 countersunk holes Ø 6 mm                                |  |
| ANGLE FIXTURE WITH 1 COUNTERSUNK HOLE AND 1 SLOT HOLE                             | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                  |  |
|  | 60         | <b>REF. 12021 - ANGLE FIXTURE WITH 1 COUNTERSUNK HOLE AND 1 SLOT HOLE</b><br>/ black anodized aluminium for the attachment of the side partition to the wall<br>/ 1 countersunk hole Ø 6 mm<br>/ 1 slot hole |  |

STAINLESS STEEL

The CUBILOX stainless steel range is made of high-quality stainless steel.

The inox line is a sleek design and of high quality. We strive for a high level of finishing.

The inox CUBILOX range includes all hardware for various panel thicknesses and for partitions with outward or inward opening doors, for door in line as well as overlay doors.



| ELEGANCE - ADJUSTABLE FOOT 90 MM - 130 MM PANEL 10 MM & 13 mm                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 12      | 24         | <b>REF. 10675 - ELEGANCE - ADJUSTABLE FOOT 90 - 130 MM PANEL 10 MM</b><br>/ adjustable foot made in brushed 316 stainless steel for height under panel from 90 mm to 130 mm<br>/ suitable for panels with thickness of 10 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                                   | 12      | 24         | <b>REF. 10677 - ELEGANCE - ADJUSTABLE FOOT 90 - 130 MM PANEL 13 MM</b><br>/ adjustable foot made in brushed 316 stainless steel for height under panel from 90 mm to 130 mm<br>/ suitable for panels with thickness of 13 mm<br><br>/ 30 mm tube diameter - 35 mm panel holder diameter<br>/ base in nylon reinforced fiberglass with 4 holes of Ø 7 mm for attachment to the floor and with M12 threaded rod for height adjustment<br>/ the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws<br>/ the cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel |


| ELEGANCE - ADJUSTABLE FOOT 130 - 170 MM PANEL 10 & 13 MM                           | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 12      | 24         | <b>REF. 10676 - ELEGANCE - ADJUSTABLE FOOT 130 - 170 MM PANEL 10 MM</b><br>/ adjustable foot made in brushed 316 stainless steel for height under panel from 130 mm to 170 mm<br>/ suitable for panels with thickness of 10 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                                    | 12      | 24         | <b>REF. 10678 - ELEGANCE - ADJUSTABLE FOOT 130 - 170 MM PANEL 13 MM</b><br>/ adjustable foot made in brushed 316 stainless steel for height under panel from 130 mm to 170 mm<br>/ suitable for panels with thickness of 13 mm<br><br>/ 30 mm tube diameter - 35 mm panel holder diameter<br>/ base in nylon reinforced fiberglass with 4 holes of Ø 7 mm for attachment to the floor and with M12 threaded rod for height adjustment<br>/ the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws<br>/ the cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel |



| ADJUSTABLE FOOT 90 - 130 MM PANEL 10 MM                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 12      | 24         | <b>REF. 3867 - ADJUSTABLE FOOT 90 - 130 MM PANEL 10 MM</b><br>/ adjustable foot made in brushed 316 stainless steel for height under panel from 90 mm to 130 mm<br>/ suitable for panels with thickness of 10 mm<br>/ 30 mm tube diameter - 35 mm panel holder diameter<br>/ base in nylon reinforced fiberglass with 4 holes of Ø 7 mm for attachment to the floor and with M12 threaded rod for height adjustment<br>/ the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws<br>/ the cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel |

| ADJUSTABLE FOOT 130 - 170 MM PANEL 13 MM                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 12      | 24         | <b>REF. 3866 - ADJUSTABLE FOOT 130 - 170 MM PANEL 13 MM</b><br>/ adjustable foot made in brushed 316 stainless steel for height under panel from 130 mm to 170 mm<br>/ suitable for panels with thickness of 13 mm<br>/ 30 mm tube diameter - 35 mm panel holder diameter<br>/ base in nylon reinforced fiberglass with 4 holes of Ø 7 mm for attachment to the floor and with M12 threaded rod for height adjustment<br>/ the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws<br>/ the cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel |

| ADJUSTABLE FOOT 130 - 170 MM PANEL 13 MM                                              | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 12      | 24         | <b>REF. 3865 - ADJUSTABLE FOOT 90 - 130 MM PANEL 13 MM</b><br>/ adjustable foot made in brushed 316 stainless steel for height under panel from 90 mm to 130 mm<br>/ suitable for panels with thickness of 13 mm<br>/ 30 mm tube diameter - 35 mm panel holder diameter<br>/ base in nylon reinforced fiberglass with 4 holes of Ø 7 mm for attachment to the floor and with M12 threaded rod for height adjustment<br>/ the height of the panel holder is adjusted using a 32 mm flat wrench, our ref. 3377<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 316 stainless steel with an outer diameter of 72 mm at the base allows easy access to the screws<br>/ the cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel |

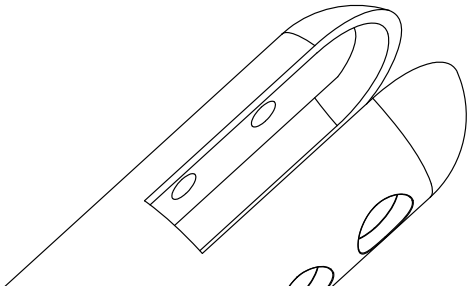

| PANEL HOLDER 90 - 130 MM - >24 MM WITH HIDDEN MOUNTING PLATE                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |
|---------------------------------------------------------------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  <div>ON REQUEST</div> | 12      | 24         | <b>REF. 14729 - PANEL HOLDER 90 - 130 MM - &gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in stainless steel for height under panel between 90 mm and 130 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between metal and floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |  |

| PANEL HOLDER 140 - 170 MM - >24 MM WITH HIDDEN MOUNTING PLATE                                           | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
|---------------------------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  <div>ON REQUEST</div> | 12      | 24         | <b>REF. 14730 - PANEL HOLDER 140 - 170 MM - &gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in stainless steel for height under panel between 90 mm and 130 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between metal and floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |  |

| PANEL HOLDER 170 - 210 MM - >24 MM WITH HIDDEN MOUNTING PLATE                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |
|-----------------------------------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  <div>ON REQUEST</div> | 12      | 24         | <b>REF. 14769 - PANEL HOLDER 170 - 210 MM - &gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in stainless steel for height under panel between 170 mm and 210 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between metal and floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |  |

| SET DOORKNOBS 30 MM                                                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                 |  |
|-------------------------------------------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | 20      | 40         | <b>REF. 3851 - SET DOORKNOBS 30 MM</b><br>/ set of Ø 30 mm doorknobs in brushed 316 stainless steel<br>/ suitable for panel thicknesses of 10 mm and 13 mm<br>/ 1 male knob is equipped with an M8 stainless steel threaded rod<br>/ 1 female knob has an inner thread of M8 SS threaded rod and is locked laterally using a 3 mm Allen key |  |

| DOOR LOCK FOR 13 MM PANEL - IN LINE                                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                            |  |
|-------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | 10      | 60         | <b>REF. 10300 - DOOR LOCK FOR 13 MM PANEL - IN LINE</b><br>/ twist lock in brushed 316 stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for panels fitted in-line with a thickness of 13 mm<br>/ 55 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 30 mm |  |

| DOOR LOCK FOR 13 MM PANEL - OVERLAY                                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  |
|-------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | 8       | 48         | <b>REF. 10301 - DOOR LOCK FOR 13 MM PANEL - OVERLAY DOOR</b><br>/ twist lock in brushed 316 stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for overlay doors with a thickness of 13 mm thanks to an integrated 17 mm intermediate piece<br>/ 55 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 50 mm |  |

| DOOR LOCK FOR 10 MM PANEL - IN LINE                                                   | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
|---------------------------------------------------------------------------------------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | 10      | 60         | <b>REF. 10302 - DOOR LOCK FOR 10 MM PANEL - IN LINE</b><br>/ twist lock in brushed stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for panels fitted in-line with a thickness of 10 mm<br>/ 55 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 25 mm |  |

| DOOR LOCK FOR 10 MM PANEL - OVERLAY                                                   | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
|---------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | 10      | 60         | <b>REF. 10303 - DOOR LOCK FOR 10 MM PANEL - OVERLAY DOOR</b><br>/ twist lock in brushed stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for overlay doors with a thickness of 10 mm thanks to an integrated 14 mm intermediate piece<br>/ 55 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 45 mm |  |

| RIGHT HINGE<br>WITH COVER CAPS                                                    | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 90         | <b>REF. 3856 - RIGHT HINGE WITH COVER CAPS</b><br>/ brushed 316 stainless steel<br>/ mounted on the right side of the door<br>/ grease lubricated Ø 12 mm inner pin in stainless steel<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 12/13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |

| LEFT HINGE<br>WITH COVER CAPS                                                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 90         | <b>REF. 3857 - LEFT HINGE WITH COVER CAPS</b><br>/ brushed 316 stainless steel<br>/ mounted on the left side of the door<br>/ grease lubricated Ø 12 mm inner pin in stainless steel<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 12/13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |

| RIGHT SPRING HINGE<br>WITH COVER CAPS                                               | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 15      | 90         | <b>REF. 3858 - RIGHT SPRING HINGE WITH COVER CAPS</b><br>/ brushed 316 stainless steel<br>/ mounted on the right side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin<br>/ stainless steel spring in the hollow pin<br>/ the tension of the spring is adjusted at the upper side of the hinge with the help of a flat screwdriver and locked to the side of the hinge using a 2.5 mm Allen key<br>/ the spring may be extended to 180° with a closed door<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 12/13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |

| LEFT SPRING HINGE<br>WITH COVER CAPS                                                | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------------------------------------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 15      | 90         | <b>REF. 3859 - LEFT SPRING HINGE WITH COVER CAPS</b><br>/ brushed 316 stainless steel<br>/ mounted on the left side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin<br>/ stainless steel spring in the hollow pin<br>/ the tension of the spring is adjusted at the upper side of the hinge with the help of a flat screwdriver and locked to the side of the hinge using a 2.5 mm Allen key<br>/ the spring may be extended to 180° with a closed door<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 12/13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |


SCREWS FOR MOUNTING THE HINGE  
10 mm panel, item 15186\* (5x10)  
13 mm panel, item 13831\* (5x12)  
\*For mounting directly onto the panel (no adapter)

| HINGE ADAPTER FOR 10 MM<br>OVERLAY DOORS                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                              |
|-------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 120        | <b>REF. 3860 - HINGE ADAPTER FOR 10 MM OVERLAY DOORS</b><br>/ black nylon, 14 mm thick<br>/ used for 10 mm overlay doors, mounted between the hinges and the fixed panel |


| HINGE ADAPTER FOR 13 MM<br>OVERLAY DOORS                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                              |
|-------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 120        | <b>REF. 3861 - HINGE ADAPTER FOR 13 MM OVERLAY DOORS</b><br>/ black nylon, 17 mm thick<br>/ used for 13 mm overlay doors, mounted between the hinges and the fixed panel |

| SMALL CLOTHES HOOK                                                                    | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                        |
|---------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50      | 200        | <b>REF. 3862 - SMALL CLOTHES HOOK</b><br>/ brushed 316 stainless steel - 3 mm<br>/ width 16 mm - height 50 mm - hook depth 18 mm<br>/ 2 countersunk Ø 5.5 mm holes |

| LARGE CLOTHES HOOK                                                                    | QTY/BAG | QTY/CARTON | DESCRIPTION                                                                                                                                                        |
|---------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 1       | 150        | <b>REF. 3863 - LARGE CLOTHES HOOK</b><br>/ brushed 316 stainless steel - 3 mm<br>/ width 20 mm - height 60 mm - hook depth 20 mm<br>/ 2 countersunk Ø 5.5 mm holes |

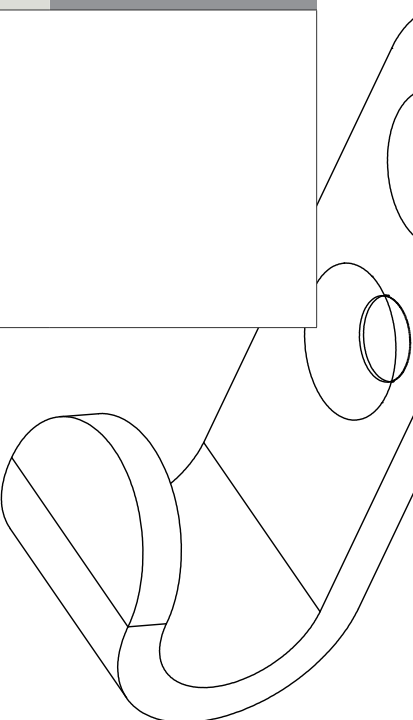

| ANGLE FIXTURE WITH 2 ROUND HOLES                                                    | QTY/BAG | QTY/CARTON | DESCRIPTION                                                                                                                                                                         |
|-------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 20      | 120        | <b>REF. 3864 - ANGLE FIXTURE WITH 2 ROUND HOLES</b><br>/ brushed 316 stainless steel - 2 mm<br>/ 2 x 6 mm holes for attachment to the panel                                         |
| 10 MM PANEL-TO-WALL CLAMP                                                           | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                         |
|    | 25      | 100        | <b>REF. 3868 - 10 MM PANEL-TO-WALL CLAMP</b><br>/ brushed 316 stainless steel - 2 mm<br>/ 6 mm holes for attachment to the panel<br>/ hole for wall mounting has a diameter of 6 mm |
| 13 MM PANEL-TO-WALL CLAMP                                                           | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                         |
|  | 25      | 100        | <b>REF. 3869 - 13 MM PANEL-TO-WALL CLAMP</b><br>/ brushed 316 stainless steel - 2 mm<br>/ 6 mm holes for attachment to the panel<br>/ hole for wall mounting has a diameter of 6 mm |

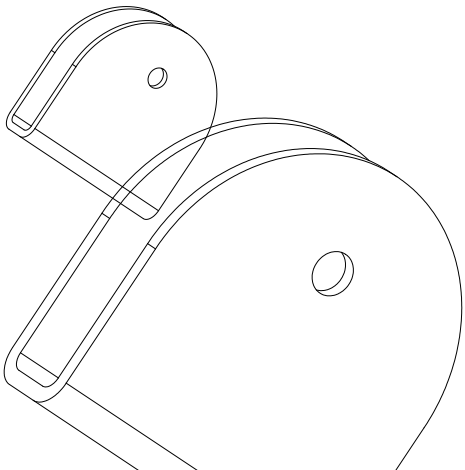

| ADJUSTABLE FOOT 90-130 MM - VERSION SS304 - PANEL 13 MM                               | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 12      | 60         | <b>REF. 14041 - ADJUSTABLE FOOT 90-130 MM - VERSION SS304 - PANEL 13 MM</b><br>/ brushed 304 stainless steel for height under panel from 90 mm to 130 mm<br>/ suitable for panel thickness of 13 mm<br>/ 30 mm panel holder diameter<br>/ base made by 3 mm steel with 6 x Ø 7 mm holes for attachment to the floor and with M12 threaded rod for height adjustment, polyamide base plate between the steel base and the floor<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 304 stainless steel with an outer diameter of 65 mm at the base allows easy access to the screws<br>/ the cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel   |
| ADJUSTABLE FOOT 130-170 MM - VERSION SS304 - PANEL 13 MM                              | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|   | 12      | 60         | <b>REF. 14042 - ADJUSTABLE FOOT 130-170 MM - VERSION SS304 - PANEL 13 MM</b><br>/ brushed 304 stainless steel for height under panel from 130 mm to 170 mm<br>/ suitable for panel thickness of 13 mm<br>/ 30 mm panel holder diameter<br>/ base made by 3 mm steel with 6 x Ø 7 mm holes for attachment to the floor and with M12 threaded rod for height adjustment, polyamide base plate between the steel base and the floor<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 304 stainless steel with an outer diameter of 65 mm at the base allows easy access to the screws<br>/ cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel     |
| ADJUSTABLE FOOT 170-210 MM - VERSION SS304 - PANEL 13 MM                              | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|  | 12      | 60         | <b>REF. 14043 - ADJUSTABLE FOOT 170-210 MM - VERSION SS304 - PANEL 13 MM</b><br>/ brushed 304 stainless steel for height under panel from 170 mm to 210 mm<br>/ suitable for panel thickness of 13 mm<br>/ 30 mm panel holder diameter<br>/ base made by 3 mm steel with 6 x Ø 7 mm holes for attachment to the floor and with M12 threaded rod for height adjustment, polyamide base plate between the steel base and the floor<br>/ a lock nut that is tightened with a 20 mm wrench ensures panel holder stability<br>/ cover cap in 304 stainless steel with an outer diameter of 65 mm at the base allows easy access to the screws<br>/ the cover cap can be pushed up to allow access when tightening the foot<br>/ 2 countersunk Ø 5 mm holes in the panel holder for attaching the panel |
| SPACER - VERSION SS304 - 13 TO 10 MM FOOT                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|  | 20      | 100        | <b>REF. 14649 - SPACER - VERSION SS304 - 13 TO 10 MM FOOT</b><br>/ brushed 304 stainless steel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

| PANEL HOLDER 90 - 130 MM - >24 MM WITH HIDDEN MOUNTING PLATE                                              | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <div>ON REQUEST</div>   | 12      | 60         | <b>REF. 14742 - PANEL HOLDER 90 - 130 MM - &gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in stainless steel for height under panel between 170 mm and 210 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel  |
| PANEL HOLDER 140 - 170 MM - >24 MM WITH HIDDEN MOUNTING PLATE                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  <div>ON REQUEST</div>   | 12      | 60         | <b>REF. 14743 - PANEL HOLDER 140 - 170 MM - &gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in stainless steel for height under panel between 170 mm and 210 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |
| PANEL HOLDER 170 - 210 MM - >24 MM WITH HIDDEN MOUNTING PLATE                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  <div>ON REQUEST</div> | 12      | 60         | <b>REF. 14768 - PANEL HOLDER 170 - 210 MM - &gt;24 MM WITH HIDDEN MOUNTING PLATE</b><br>/ base in stainless steel with 6 x Ø 7 mm holes for mounting to the floor and with M12 threaded rod for height adjustment<br>/ adjustable foot made in stainless steel for height under panel between 170 mm and 210 mm<br>/ panels (thickness of >24 mm) can be fixed at the bottom with hidden mounting plate.<br>/ rod diameter 18 mm<br>/ underneath the base, a polyamide cover (click system) to avoid contact between the metal and the floor<br>/ the height of the panel holder is adjusted using a 17 mm flat key<br>/ a 17 mm counter-nut ensures the stability of the panel holder<br>/ a double cover cap in anodized aluminium with a 71 mm outer diameter at the base (click system) ensures easy access to the screws<br>/ 2 countersunk Ø 5 mm holes in the panel holder to secure the panel |
| SET DOORKNOBS 25 MM                                                                                       | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                        | 15      | 45         | <b>REF. 14527 - SET DOORKNOBS 25 MM</b><br>/ set of Ø 25 mm doorknobs in brushed SS304<br>/ suitable for panel thicknesses of 10 mm and 13 mm<br>/ 1 doorknob is equipped with an M8 stainless steel threaded rod<br>/ the other doorknob has an inner thread of M8 and is locked laterally using a 3 mm Allen key                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| SET DOORKNOBS 30 MM                                                                                       | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                        | 15      | 45         | <b>REF. 14060 - SET DOORKNOBS 30 MM</b><br>/ set of Ø 30 mm doorknobs in brushed SS304<br>/ suitable for panel thicknesses of 10 mm and 13 mm<br>/ 1 male knob is equipped with an M8 stainless steel threaded rod<br>/ 1 female knob has an inner thread of M8 and is locked laterally using a 3 mm Allen key                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

| DOOR LOCK FOR 13 MM PANEL - IN LINE - SS 304                                          | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 15      | 45         | <b>REF. 14046 - DOORLOCK IN LINE - VERSION SS304 - COIN EMERGENCY RELEASE</b><br>/ twist lock in 304 brushed stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for panels fitted in-line with a thickness of 13 mm<br>/ 52 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an coin<br>/ incl. 2 x DIN 965 A2 M4 x 30 mm                                                                         |
| DOOR LOCK FOR 13 MM OVERLAY DOOR - SS 304                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|    | 15      | 45         | <b>REF. 14047 - DOORLOCK OVERLAY DOOR - VERSION SS304 - PANEL 13 MM KEY LOCK</b><br>/ twist lock in 304 brushed stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for overlay doors with a thickness of 13 mm thanks to an integrated 17 mm intermediate piece<br>/ 52 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 40 mm |
| DOOR LOCK FOR 10 MM PANEL - IN LINE - SS 304                                          | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|  | 15      | 45         | <b>REF. 14044 - DOORLOCK IN LINE - VERSION SS304 - PANEL 10/13 MM KEY LOCK</b><br>/ twist lock in 304 brushed stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for panels fitted in-line with a thickness of 10 mm<br>/ 52 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 30 mm                                            |
| DOOR LOCK FOR 10 MM OVERLAY DOOR - SS 304                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|  | 15      | 45         | <b>REF. 14045 - DOORLOCK OVERLAY DOOR - VERSION SS304 - PANEL 10 MM KEY LOCK</b><br>/ twist lock in 304 brushed stainless steel with 'free' indication in white and 'occupied' indication in red<br>/ suitable for overlay doors with a thickness of 10 mm thanks to an integrated 14 mm intermediate piece<br>/ 52 mm outer diameter<br>/ 360° rotational angle with soft stop every 90°<br>/ unlocking from the outside using an 8 mm square socket key ref. 1134<br>/ incl. 2 x DIN 965 A2 M4 x 40 mm |
| ROD HANDLE DOORLOCK - VERSION SS304                                                   | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|  | 15      | 45         | <b>REF. 14481 - ROD HANDLE DOORLOCK - VERSION SS304</b><br>/ twist lock in 304 brushed stainless steel with 'free' indication in green and 'occupied' indication in red<br>/ suitable for in-line doors with a thickness of 10 mm and 13 mm<br>/ 54 mm outer diameter<br>/ 180° rotational angle<br>/ unlocking from the outside using a coin<br>/ incl. 2 x DIN 965 A2 M4 x 20 mm                                                                                                                       |

| RIGHT HINGE - VERSION SS304 - WITH COVER CAPS                                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 90         | <b>REF. 14048 - RIGHT HINGE - VERSION SS304 - WITH COVER CAPS</b><br>/ brushed 304 stainless steel<br>/ mounted on the right side of the door<br>/ grease lubricated Ø 12 mm inner pin in stainless steel<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |

| LEFT HINGE - VERSION SS304 - WITH COVER CAPS                                      | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 90         | <b>REF. 14049 - LEFT HINGE - VERSION SS304 - WITH COVER CAPS</b><br>/ brushed 304 stainless steel<br>/ mounted on the left side of the door<br>/ grease lubricated Ø 12 mm inner pin in stainless steel<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |

| RIGHT SPRING HINGE - VERSION SS304 - WITH COVER CAPS                                | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 15      | 90         | <b>REF. 14050 - RIGHT SPRING HINGE - VERSION SS304 - WITH COVER CAPS</b><br>/ brushed 304 stainless steel<br>/ mounted on the right side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin with stainless steel spring inside<br>/ the tension of the spring is adjusted at the upper side of the hinge with the help of a flat screwdriver and locked to the side of the hinge using a 2.5 mm Allen key<br>/ the spring may be extended to 180° with a closed door<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |

| LEFT SPRING HINGE - VERSION SS304 - WITH COVER CAPS                                 | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 15      | 90         | <b>REF. 14051 - LEFT SPRING HINGE - VERSION SS304 - WITH COVER CAPS</b><br>/ brushed 304 stainless steel<br>/ mounted on the left side of the door<br>/ grease lubricated hollow brass Ø 12 mm inner pin with stainless steel spring inside<br>/ the tension of the spring is adjusted at the upper side of the hinge with the help of a flat screwdriver and locked to the side of the hinge using a 2.5 mm Allen key<br>/ the spring may be extended to 180° with a closed door<br>/ a nylon sleeve is mounted over the pin between the 2 hinge parts<br>/ 2 countersunk Ø 5 mm mounting holes on each side of the hinge<br>/ the screws (not included) are invisible after installation of the cover caps<br>/ suitable for panels fitted in-line with a thickness of 10 mm and 13 mm<br>/ for use with 14 mm hinge adapter ref. 3860 for 10 mm thick overlay door and with 17 mm hinge adapter ref. 3861 for 13 mm thick overlay door<br>/ maximum load capacity is 40 kg per hinge |

**SCREWS FOR MOUNTING HINGES**  
**10 mm panel, item 15186\* (5x10)**  
**13 mm panel, item 13831\* (5x12)**  
**\*For mounting directly onto the panel (no adapter)**

| COAT HOOK WITH DOORSTOP FUNCTION VERSION SS304 STRAIGHT VERSION                     | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 90         | <b>REF. 14479 - COAT HOOK WITH DOORSTOP FUNCTION - VERSION SS304 - STRAIGHT VERSION</b><br>/ brushed 304 stainless steel<br>/ length 80 mm - diameter 16 mm - hook depth 7.5 mm<br>/ rubber doorstop<br>/ fixing plate : diameter 48mm + 4 countersunk Ø 5.0 mm holes<br>/ cover cap : diameter 49mm<br>/ incl. 2 screws |

| COAT HOOK WITH DOORSTOP FUNCTION VERSION SS304 BENDED VERSION                        | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 90         | <b>REF. 14480 - COAT HOOK WITH DOORSTOP FUNCTION - VERSION SS304 - BENDED VERSION</b><br>/ brushed 304 stainless steel - 3 mm<br>/ width 20 mm - height 50 mm - hook depth 38 mm<br>/ 2 countersunk Ø 5.5 mm holes<br>/ length doorstop 86mm<br>/ rubber doorstop<br>/ incl. 2 screws |

| LARGE COAT HOOK VERSION SS304                                                         | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 90         | <b>REF. 14704 - LARGE COAT HOOK - VERSION SS304</b><br>/ brushed 304 stainless steel - 3 mm<br>/ width 20 mm - height 140 mm - hook depth 43 mm<br>/ 2 countersunk Ø 5.0 mm holes<br>/ incl. 2 screws |

| HINGE ADAPTER FOR 10 MM OVERLAY DOORS                                            | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                           |
|----------------------------------------------------------------------------------|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 30      | 120        | <b>REF. 3860 - HINGE ADAPTER FOR 10 MM OVERLAY DOORS</b><br>/ black nylon, 14 mm thick<br>/ for 10 mm overlay doors is mounted between the hinges and the fixed panel |
|  | 30      | 120        | <b>REF. 3861 - HINGE ADAPTER FOR 13 MM OVERLAY DOORS</b><br>/ black nylon, 17 mm thick<br>/ for 13 mm overlay doors is mounted between the hinges and the fixed panel |

| EMERGENCY OPENING KEY VERSION PART - SS304 - DOORLOCK IN LINE ONLY                    | QTY/BAG | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------------------------------------|---------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 50      | 200        | <b>REF. 14478 - EMERGENCY OPENING KEY VERSION PART - SS304 - DOORLOCK IN LINE ONLY</b><br>/ spare part doorlock<br>/ only for doorlock in line<br><br>/ Various lengths available upon request<br>/ for use with 14044, 14045, 14046, and 14047                                        |
| EMERGENCY OPENING COIN VERSION PART - SS304 - DOORLOCK IN LINE ONLY                   | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                            |
|    | 50      | 200        | <b>REF. 14526 - EMERGENCY OPENING COIN VERSION PART - SS304 - DOORLOCK IN LINE ONLY</b><br>/ spare part doorlock<br>/ only for doorlock in line<br><br>/ Various lengths available upon request                                                                                        |
| COVER FOOT SET BOTTOM/TUBE 316 90-130 MM                                              | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                            |
|  | 60      | 300        | <b>REF. 14619 - COVER FOOT SET BOTTOM/TUBE 316   90-130 MM</b><br>/ brushed 316 stainless steel foot cover set<br>/ suitable for 14041<br>/ 30 mm tube<br>/ cover cap an outer diameter of 65 mm at the base<br>/ cover cap can be pushed up to allow access when tightening the foot  |
| COVER FOOT SET BOTTOM/TUBE 316 130-170 MM                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                            |
|  | 60      | 300        | <b>REF. 14620 - COVER FOOT SET BOTTOM/TUBE 316   130-170 MM</b><br>/ brushed 316 stainless steel foot cover set<br>/ suitable for 14042<br>/ 30 mm tube<br>/ cover cap an outer diameter of 65 mm at the base<br>/ cover cap can be pushed up to allow access when tightening the foot |
| COVER FOOT SET BOTTOM/TUBE 316 170-210 MM                                             | QTY/BOX | QTY/CARTON | DESCRIPTION                                                                                                                                                                                                                                                                            |
|  | 60      | 300        | <b>REF. 14621 - COVER FOOT SET BOTTOM/TUBE 316   170-210 MM</b><br>/ brushed 316 stainless steel foot cover set<br>/ suitable for 14043<br>/ 30 mm tube<br>/ cover cap an outer diameter of 65 mm at the base<br>/ cover cap can be pushed up to allow access when tightening the foot |

| SOCKET                                                                              | QTY/BOX | ART.  | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                          |  |
|-------------------------------------------------------------------------------------|---------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|    | 2000    | 2941  | REF. 2941 - SOCKET IN SS AISI 316 M5 DIAM. 7,8 MM X L 9 MM<br>/ socket in lubricated stainless steel 316, M5 Ø 7,8 mm x 9,00 mm                                                                                                                                                                                                                                                      |  |
| 32 STAINLESS STEEL WRENCH<br>STEEL FOR ADJUSTING<br>ADJUSTABLE FEET                 | QTY/BOX | ART.  | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                          |  |
|    | 50      | 3097  | REF. 3097 - BENDED KEY FOR REINFORCED PANEL HOLDER<br>/ for ref. 3865/ 3866/ 3867<br>/ bended version<br>/ inox SS304                                                                                                                                                                                                                                                                |  |
| 32 WRENCH IN GALVANIZED STEEL FOR<br>ADJUSTMENT<br>ADJUSTABLE FEET                  | QTY/BOX | ART.  | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                          |  |
|    | 50      | 3377  | REF. 3377 - 32 WRENCH IN GALVANIZED STEEL FOR ADJUSTMENT ADJUSTABLE FEET<br>/ for ref. 3865/ 3866/ 3867                                                                                                                                                                                                                                                                              |  |
| KEY FOR DOOR LOCK                                                                   | QTY/BOX | ART.  | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                          |  |
|  | 50      | 1134  | REF. 1134 - KEY FOR DOOR LOCK<br>/ chromed steel socket key for unlocking door locks with 8mm square spindle                                                                                                                                                                                                                                                                         |  |
| FINGER PROTECTION PROFILE                                                           | QTY/BOX | RÉF   | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                          |  |
|  | 25      | 13799 | RÉF. 13799 - FINGER PROTECTION PROFILE<br>/ for 13 mm inline doors<br>/ child-friendly (kids proof)<br>/ duo-extrusion, solid base and soft protection part<br>/ economic solution<br>/ can be used with all Cubilox hinges<br>/ designed for direct installation without screws<br>/ groove 3 mm wide, 8 mm deep; can easily be shortened to the desired length<br>/ length 2100 mm |  |

All prices are subject to change due to fluctuations in land prices, labor costs, and exchange rates.

Prices exclude VAT - ex works.

| DIN 965 A2 TX25 M5X12<br>PRECOAT 80                                                   | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|---------------------------------------------------------------------------------------|-------------|-------|-----------------------------------------------------------|--|
|    | 1000        | 4639  | DIN 965 A2 TX25 M5X12 PRECOAT 80<br>/ screw with precoat  |  |
| DIN 965 A2 TX25 M5X16<br>PRECOAT 80                                                   | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|    | 1000        | 4642  | DIN 965 A2 TX25 M5X16 PRECOAT 80<br>/ screw with precoat  |  |
| DIN 965 A2 TX25 M5X25<br>PRECOAT 80                                                   | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|    | 1000        | 4640  | DIN 965 A2 TX25 M5X25 PRECOAT 80<br>/ screw with precoat  |  |
| DIN 965 A2 TX25 M5X35<br>PRECOAT 80                                                   | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|    | 1000        | 4643  | DIN 965 A2 TX25 M5X35 PRECOAT 80<br>/ screw with precoat  |  |
| DIN 965 A2 TX25 M5X40<br>PRECOAT 80                                                   | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|   | 1000        | 10556 | DIN 965 A2 TX25 M5X40 PRECOAT 80<br>/ screw with precoat  |  |
| DIN 7985 A2 TX25 M5X12<br>PRECOAT 80                                                  | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|  | 5000        | 4641  | DIN 7985 A2 TX25 M5X12 PRECOAT 80<br>/ screw with precoat |  |
| CUBILOX A2 TX25 5X10<br>SELF-TAPPING                                                  | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|  | 200         | 15186 | CUBILOX A2 TX25 5X10 SELF-TAPPING<br>/ self-tapping screw |  |
| CUBILOX A2 TX25 5X12<br>SELF-TAPPING                                                  | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|  | 200         | 13831 | CUBILOX A2 TX25 5X12 SELF-TAPPING<br>/ self-tapping screw |  |
| CUBILOX A2 TX25 5X16<br>SELF-TAPPING                                                  | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|  | 200         | 15185 | CUBILOX A2 TX25 5X16 SELF-TAPPING<br>/ self-tapping screw |  |
| CUBILOX A2 TX25 6X16<br>SELF-TAPPING                                                  | QTY/<br>BOX | ART.  | DESCRIPTION                                               |  |
|  | 200         | 13832 | CUBILOX A2 TX25 6X16 SELF-TAPPING<br>/ self-tapping screw |  |



CONTACT US FOR  
MORE CUBICARE



CUBILOX a division of



Barrage 105  
8793 St. Eloois Vijve  
T +32 (0)56 32 74 60  
info@cubilox.be  
**www.cubilox.be**

NSE NV is an SME which sets great store by good service and flexibility. Contact us for a visit, a catalogue, a quotation or to obtain some product samples. We will get back to you as soon as possible.

**www.nsenv.be**