HIMOINSA®
THE ENERGY

Model: HRYW-45 T5

HR RANGE
Soundproofed rental
Powered by YANMAR

- B10R
- WATER-COOLED
- THREE PHASE
- 50 HZ
- STG.2 (FLEXIBLE SCHEME)
- DIESEL

Generating Rates

SERVICE		PRP	STANDBY
Power	kVA	41	45
Power	kW	33	36
Rated Speed	r.p.m.	1.500	
Standard Voltage	V	400	
Available Voltages	V	230 - 230/132 - 400/230 V	
Rated at power factor	Cos Phi	0,8	

QR Code

HIMOINSA Company with quality certification ISO 9001
HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2006/95/EC Low voltage.
- 2004/108/CE Electromagnetic compatibility.
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2002/88/EC & 2004/26/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference: 1000 mbar, 25ºC, 30% relative humidity. Power according to ISO 3046 normative.

P.R.P. Prime Power - ISO 8528:
Prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during a 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

Standby Power (ISO 3046 Fuel Stop power):
Power available for use at variable loads for limited annual time (500h), within the following limits of maximum operating time: 100% load 25h per year – 90% load 200h per year. No overload available.
Applicable in case of failure of the main in areas of reliable electrical network.

HIMOINSA HEADQUARTERS:
Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 info@himoinsa.com www.himoinsa.com

Manufacture facilities:
SPAIN • FRANCE • INDIA • CHINA • USA
Subsidiaries:
ITALY | PORTUGAL | POLAND | GERMANY I SINGAPORE | UAE | MEXICO | PANAMÁ | ARGENTINA

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Engine Specifications 1.500 r.p.m.

ENGINE		PRP	STANDBY
Rated Output	kW	37,7	41,4
Manufacturer		YANMAR	
Model		4TNV98T GGEHR	
Engine Type		Diesel 4 strokes-cycle	
Injection Type		Direct	
Aspiration Type		Turbocharged	
Ciylinders Arrangement		4 - L	
Bore and Stroke	mm	98 x 110	
Displacement	L	3,319	
Cooling System		coolant	
Lube Oil Specifications		SAE 3 class 10W30 / API grade CD,CF	
Compression Ratio		18,1	
Fuel Consumption StandBy	l/h	11,3	
Fuel Consumption 100% PRP	l/h	10,25	
Fuel Consumption 75 % PRP	l/h	7,78	
Fuel Consumption 50 % PRP	l/h	5,49	
Lube Oil Consumption Full Load	g/kwh	0,27	
Total Oil Capacity	L	10,5	
Total Coolant Capacity	L	9	
Governor	Type	Mechanical	
Air Filter	Type	Dry	
Inner diameter exhaust pipe	mm	40	

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Generator

Generator		
Poles	Num	4
Winding Conections (standard)		Star-serie
Frame Mounting		S-3 11"1/2
Insulation	Class	H class
Enclosure (according IEC-34-5)		IP23
Exciter System		self-excited, brushless
Voltage Regulator		A.V.R. (Electronic)
Bearing		Single bearing
Coupling		Flexible disc
Coating type		Standar (Vacuum impregnation)

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5

HR RANGE
Soundproofed rental
Powered by YANMAR

Control Panel Models

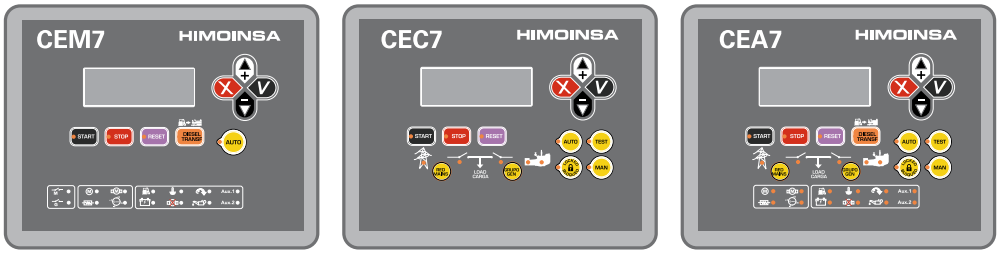

CEM7 CEC7 CEA7

FUNCIONALITY	PANEL MODEL	CONTROLLER MODE
Auto-start	M5	CEM7
Automatic Control Panel Without Mains Control	AS5	CEM7**
Automatic Control Panel With Mains Control (customer change over contactors)	AS5	CEA7
Automatic Control Panel With Mains Control (Himoinsa change over contactor with display)	AS5XCC2	CEM7+CEC7
Automatic Mains Failure (wall mounted panel)	AC5	CEA7

(**) Pre-heating resistance in the Genset and Battery charger in the control panel included.

Option available: Auto-start control panel without circuit breaker

General Description

CEM 7

The CEM7 controller unit is a device able to control de operation, monitoring and protection of a generating set. The controller unit consists of 2 different modules:
1.The VISUALIZATION module
2.The MEASUREMENTS module
VISUALIZATION MODULE
Provides information about the status of the device and, at the same time, allows the user to interact with it. It consists on a backlit display and various LEDs for monitoring the status of the controller and buttons that allow the user to control, program and configure the functions of the unit.
MEASUREMENTS MODULE
Controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.
The connexion between the visualization module and the measurements module is made with a CAN communication bus.This feature allows the intercommunion of other modules to the main controller with a scalability warranty.

CEC 7

The CEC7 controller unit is a net sings supervision equipment, and control and supply supplier through generating set.The controller unit consists of 2 different modules:
1.The VISUALIZATION module
2.The MEASUREMENTS module
VISUALIZATION MODULE
The visualization module provides information about the status of the device and, at the same time, allows the user to interact with it. With this visualization module the user is able to control, program and configure the functions of the unit. It consists on a backlight display and various LEDs for monitoring the status of the controller and buttons that allow the user to control, program and configure the functions of the unit.
MEASUREMENTS MODULE
The measurements module controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances.
Every signal, sensor and actuator is connected to this module
The connection between the measure module and visualization mode is made by means of a CAN BUS (Communication Bus).This produces an interconnection between additional modules which guarantees the proper working of the controller.

CEA 7

CEA7 controller is a supervision equipment for mains signal and also a supervision and electrical supply through the genset.This controller is composed by 2 different modules:
1.VISUALIZATION module
2.MEASUREMENTS module
VISUALIZATION MODULE
The visualization module provides information about the status of the device and, at the same time, allows the user to interact with it. With this visualization module the user is able to control, program and configure the functions of the unit.
MEASUREMENTS MODULE
The measurements module controls and monitors the control board. It is located inthe rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.
Connection between the measure module and visualization mode is made by means of a CAN BUS (Communication Bus).This produces an interconnection between additional modules which guarantees the proper working of the controller.

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5

HR RANGE
Soundproofed rental
Powered by YANMAR

Control & Power Panel

1. CM Control Panel.
2. CP Power Panel.
3. On/Off Switch..
4. Emergency Stop.
5. Main Line Circuit Breaker for overload protection.
6. Main bus /hardwire connection panel with safety protection.

CE-7 Auto-start multilingual control panel

1. Voltage between each Phase & Neutral
2. Voltage between Phases
3. Current (amps) on each Phase
4. Frequency
5. Active, Aparent & Reactive Power
6. Power Factor
7. Instant Power (KwH) and Accumulative power)
8. Fuel level
9. Oil pressure, coolant temperature, oil temperature
10. Battery voltage, battery charging alternator voltage
11. Engine Speed
12. Hours running
13. Multilingual (Spanish, English, French, Italian, Portuguese, Polish, German, Chinesse, Russian, Swedish, Norwegian)

Engine Alarms

1. High coolant temperature.
2. Low oil pressure.
3. Battery charge alternator
4. Start failure.
5. Low water level.
6. Fuel storage.
7. Overspeed.
8. Underspeed.
9. Low battery voltage.
10. High coolant temperature by sensor.
11. Low oil pressure by sensor.
12. Low fuel level by sensor.
13. Unexpected shutdown.
14. Stop failure.
15. Low engine temperature.
16. Genset voltage drops.
17. Emergency stop.

Genset Alarms

1. Over-load
2. Unbalanced voltage
3. Over voltage
4. Under voltage
5. Over frequency
6. Under frequency
7. Over load
8. Short-circuit
9. Inverse Power
10. Asymmetry among phases
11. Genset contactor Failure

Mains Alarms

1. Maximum Mains Voltage.
2. Minimum Mains Voltage.
3. Maximum Mains Frequency.
4. Minimum Mains Frequency.
5. Mains phase sequence failure.
6. Mains power failure.
7. Mains contactor switching failure.

Programmable Alarms:
There are 5 programmable alarms on text and action that could be associated to any engine alarms and showed on the auxiliary led 1 and 2 of the display

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Controllers Features

	CEM 7	CEC 7	CEA 7	CEM7 + CEC7
GENERATOR READINGS				
Voltage among phases	•	•	•	•
Voltage among phases and neutral	•	•	•	•
Amperage	•	•	•	•
Frequency	•	•	•	•
Apparent power (kVA)	•	•	•	•
Active power (kW)	•	•	•	•
Reactive power (kVAr)	•	•	•	•
Power factor	•	•	•	•
MAINS READINGS				
Voltage among phases	x	•	•	•
Voltage among phase and neutral	x	•	•	•
Amperage	x	•	•	•
Frequency	x	•	•	•
Aparent power	x	x	•	•
Active power	x	x	•	•
Reactive power	x	x	•	•
Power factor	x	x	•	•
ENGINE READINGS				
Coolant temperature	•	x	•	•
Oil pressure	•	x	•	•
Fuel level (%)	•	x	•	•
Battery voltage	•	x	•	•
R.P.M.	•	x	•	•
Battery charge alternator voltage	•	x	•	•
ENGINE PROTECTIONS				
High water temperature	•	x	•	•
High coolant temperature by sensor	•	x	•	•
Low engine temperature by sensor	•	x	•	•
Low oil pressure	•	x	•	•
Low oil pressure by sensor	•	x	•	•
Low coolent level	•	x	•	•
Unexpected shutdown	•	x	•	•
Fuel storage	•	x	•	•
Fuel storage by sensor	•	x	•	•
Stop failure	•	x	•	•
Battery voltage failure	•	x	•	•
Battery charge alternator failure	•	x	•	•
Overspeed	•	x	•	•
Underspeed	•	x	•	•
Start failure	•	x	•	•
Emergency Stop	•	•	•	•
ALTERNATOR PROTECTIONS				
High frequency	•	•	•	•
Low frequency	•	•	•	•
High voltage	•	•	•	•
Low voltage	•	•	•	•
Short-circuit	•	x	•	•
Asymmetry among phases	•	•	•	•
Incorrect phase sequence	•	•	•	•
Inverse power	•	x	•	•
Overload	•	x	•	•
Genset signal droop	•	•	•	•

• Standard
x Not included
• Optional

NOTE: All protections are programmable to make "warning" or "stop with cooling time" or "without"

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5

HR RANGE
Soundproofed rental
Powered by YANMAR

Controllers Features

	CEM 7	CEC 7	CEA 7	CEM7 + CEC7
COUNTERS				
Total hour counter	•	•	•	•
Partial hour counter	•	•	•	•
Kilowatimeter	•	•	•	•
Starts valid counters	•	•	•	•
Starts failure counters	•	•	•	•
Maintenance	•	•	•	•
COMUNICATIONS				
RS232	•	•	•	•
RS485	•	•	•	•
Modbus IP	•	•	•	•
Modbus	•	•	•	•
CCLAN	•	x	•	•
Software for PC	•	•	•	•
Analogic modem	•	•	•	•
GSM/GPRS modem	•	•	•	•
Remote screen	•	x	•	•
Telesignal	•(8+4)		•(8+4)	•(8+4)
J1939	•	x	•	•
FEATURES				
Alarms history	(10) / (•+100)	-10	(10) / (•+100)	(10) / (•+100)
External start	•	•	•	•
Start inhibition	•	•	•	•
Mains failure start	•(CEC7)	•	•	•
Start under normative EJP	•	x	•	•
Genset contactor activation	•	x	x	•
Main & Genset contactor activation	x	•	•	•
Fuel transfer control	•	x	•	•
Engine temperature control	•	x	•	•
Manual override	•	x	•	•
Programmable alarms	•	x	•	•
Genset start function in test mode	•	x	•	•
Programmable outputs	•	x	•	•
Multilingual	•	•	•	•
SPECIAL FUNCTIONS				
Positioning GPS	•		•	•
Synchronization with mains	•		•	•
Mains Synchronism	•		•	•
Second Cero suppression	•		•	•
RAM 7	•		•	•
Remote screen	•		•	•
Timer	•		•	•

• Standard
x Not included
• Optional

CEC7: available when the controller CEC7 is incorparted to the installation
MPS 5.0: available application when the module MPS 5. has been incorporated to the panel.
Note: AS5 + CC2 configuration, will have all CEM7 funcionality plus CEC7 mains readings.

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Generating Sets Standard and Optional Features

Engine

- Diesel engine
- 4 strokes-cycle
- Water-cooled
- 12V Electrical system
- Radiator with blowing fan
- Water separator decanting filter (visible level)
- Mechanical governor
- Dry air cleaner
- Hot components and radiator guards
- Mobile components guards

Alternator

- Self-excited and Self-regulated
- IP23 protection degree
- Insulation H class

Electrical system

- M5 control panel with digital CEM7 controller and switched emergency stop
- Power panel with bus bars from breaker
- Safety relay in output terminal (thermomagnetical trip and alarm in controller)
- Earth leakage protection adjustable (time & sensibility) standard in M5 and AS5 configuration with MCCB
- MCCB 4P
- Battery charge alternator with ground connection
- Starting battery/ies installed and connected to the engine (supports included)
- Ground connection electrical installation with connection ready for ground pike (not supplied)

Optional : · Battery disconnector

Soundproofed version

- External filling of the fuel tank with safety key
- EMERGENCY STOP BUTTON (double protection for emergency stop Interior in panel + Exterior in canopy)
- Mechanized for power cable output
- Door with window to visualize control panel, alarms and measurements
- Handhole to fill the radiator

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Generating Sets Standard and Optional Features

Soundproofed version

· Pre-installation or niche to house the quick connection hydraulic fittins for fuel transfer
· Pressure locks
· Anti-leakage chassis, predisposed to retain liquids (retention tray)
· High capacity fuel tank, with contention base and easy external filling
· Handhole for fuel tank cleaning and drainage
· Handhole for chassis cleaning
· Oversized chassis for canopy protection
· Pulling skid and pockets for transportation with forklift
· Tilting cap in the exhaust
· Steel made chassis
· Oil sump extraction kit
· Antivibration shock absorber
· Chassis with integrated fuel tank
· Sound attenuated canopy made of high quality steel metal.
· High mechanical strenght
· Low noise level
· Attenuation through high density roock wool material
· Powder coating
· Easy acces for service mainteance
· Reinforced lifting eye to lift by crane
· Steel made residential silencer -35db(A) attenuation.

Optional : · 3 way valve fuel filling (available in 1/2" and 3/8" fittings)

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Application Data

Exhaust System		
Maximum exhaust temperature	ºC	480
Exhaust Gas Flow	m3/min	10,45
Maximum allowed back pressure	mm H2o	1000
Exhaust Flange Size (external diameter)	mm	65

Air Inlet System		
Intake Air Flow	m3/h	194,16
Cooling Air Flow	m3/s	0,979
Alternator fan air flow	m3/s	0,09

Starting System		
Starting Motor	kW	2,3
Starting Motor	CV	3,13
Recommended Battery Capacity	Ah	92
Auxiliary Voltage	Vcc	12

Fuel System		
Fuel Oil Specifications		Diesel
Fuel Tank	L	100
Other Fuel tank capacity	L	100, 190, 330

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Dimensions

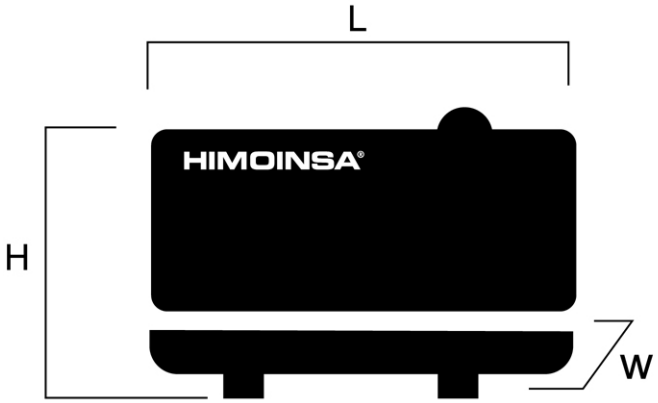

B10R	Weight and Dimensions		
(L)	Length	mm	2.150
(H)	Height	mm	1.328
(W)	Width	mm	1.025
	Shipping Volume seaworthy (standard suplier)	m3	2,93
(*)	Wet weight	Kg	952
	Fuel tank capacity	L	100
	Autonomy	Hours	13
	Sound Level	Db(A)@7m	62

(*) (with standard accesories)

STANDARD VERSION (Plastic tank)

Himoinsa reserves the right to modify any characteristic without prior notice.
Weights and dimensions based on products standar. Illustrations may include optional equipment.
Technical data described here correspond with the available information at the moment of printing.
Industrial design under patent.

Local Distributor

ISO 9001
Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail:info@himoinsa.com | www.himoinsa.com
HIMOINSA® THE ENERGY

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5
HR RANGE
Soundproofed rental
Powered by YANMAR

Another measures/dimensions of available versions

Weight and Dimensions		
(L) Length	mm	2.150
(H) Height	mm	1.328
(W) Width	mm	1.025
Shipping Volume seaworthy (standard suplier)	m3	2,93
(*) Wet weight	Kg	992
Fuel tank capacity	L	100
Autonomy	Hours	13
Sound Level	Db(A)@7m	62

(*) (with standard accesories)

OPTIONAL VERSION (Steel tank)

Weight and Dimensions		
(L) Length	mm	2.150
(H) Height	mm	1.552
(W) Width	mm	1.025
Shipping Volume seaworthy (standard suplier)	m3	3,42
(*) Wet weight	Kg	1.062
Fuel tank capacity	L	190
Autonomy	Hours	24
Sound Level	Db(A)@7m	62

(*) (with standard accesories)

HIGH CAPACITY VERSION (Steel tank)

Weight and Dimensions		
(L) Length	mm	2.150
(H) Height	mm	1.552
(W) Width	mm	1.025
Shipping Volume seaworthy (standard suplier)	m3	3,42
(*) Wet weight	Kg	1.097
Fuel tank capacity	L	330
Autonomy	Hours	42
Sound Level	Db(A)@7m	62

(*) (with standard accesories)

HIGH CAPACITY VERSION (Steel tank)

HIMOINSA®
THE ENERGY

Model: HRYW-45 T5

HR RANGE
Soundproofed rental
Powered by YANMAR

PDF Summary

Created : 04/04/2013 20:41
Author : Himoinsa
Number of pages : 13
Report Type: Data Sheet - Hr range
Generated by: HIMOINSA Engineering Dept.

Page 1. Genset data
Page 2. Engine Specifications
Page 3. Generator Specifications
Page 4. Control Panels models + General Description
Page 5. Control box and power, CE7 Panel, Alarms
Page 6. Controller features (I)
Page 7. Controller features (II)
Page 8. Generator Features & Options
Page 9. Generator Features & Options
Page 10. Installation Data
Page 11. Dimensions
Page 12. Another measures/dimensions of available versions
Page 13. PDF Summary (ID454E323038313134)

http://www.himoinsa.com/ProductDetail/ficha.aspx?id=208